

NetworkAppliance.NS0-175.v2022-01-25.q100

Exam Code:	NS0-175
Exam Name:	Cisco and NetApp FlexPod Design Specialist
Certification Provider:	Network Appliance
Free Question Number:	100
Version:	v2022-01-25
# of views:	1965
# of Questions views:	1000
https://www.freepdfdumps.com/NetworkAppliance.NS0-175.v2022-01-25.q100.html	

NEW QUESTION: 1

Which two statements are true about VXLAN configured on Cisco Nexus 9000 Series switches operating in NX-OS mode? (Choose two.)

- A. VXLAN segments are independent of the underlying network topology.
- B. VXLAN is a Layer 2 overlay scheme over a Layer 3 network.
- C. VXLAN supports the Spanning Tree Protocol for loop prevention.
- D. VXLAN is only supported on Cisco Nexus 9000 Series switches.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 2

Which of the following commands are used for running automated diagnostic analysis routines?

- A. diag dump
- B. diag list
- C. netstat -d
- D. ifstat -a

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 3

A customer has installed FlexPod and verified that all wiring connections are correct. However, the customer cannot see any FC LUNs from the NetApp AFF systems.

In this scenario, which three configuration elements should the customer verify? (Choose three.)

- A. FC zoning
- B. FC portsets
- C. MTU configuration
- D. ALUA settings
- E. igroup configuration

Answer: B,C,E ([LEAVE A REPLY](#))

NEW QUESTION: 4

The FlexPod Data Center with VMware vSphere 5.1 solution utilizes vSphere High Availability (HA).

What is a benefit of the vSphere HA feature?

- A. Ensuring zero downtime for all applications
- B. Automated restart of virtual machines on other available servers in the case of primary server failure
- C. Allocate and balance computing capacity dynamically
- D. Continuous availability for applications in the event of server failures by creating a live shadow instance of a virtual machine that is always up to date with the primary virtual machine.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 5

Which mode must your Fabric Interconnects be using to participate in the Spanning Tree Protocol (STP) and send Bridge Port Data Units (BPDUs)?

- A. Loopguard Mode
- B. End Host Mode
- C. STP Mode
- D. Switching Mode

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 6

Which Cisco UCS Fabric Interconnect model has multiple 100 Gbps ports available for use?

- A. Cisco UCS 6454
- B. Cisco UCS 6332
- C. Cisco UCS 6324
- D. Cisco UCS 6332-16UP

Answer: (SHOW ANSWER)

NEW QUESTION: 7

A C2100 appliance uses _____ to _____ disk drives.

- A. one, three
- B. two, seven
- C. one, seven
- D. two, three

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 8

What syntax is used to get an extensive help definition for a particular command?

- A. [command] help

- B. ?
- C. help [command]
- D. command ?

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 9

The best place to find information regarding a log header, such as x-cs-headerlength, is the _____.

- A. Guide to Messages and Logfile Entries
- B. Administration Guide
- C. Deployment Guide
- D. Guide to Caching Protocols and Services

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 10

You are sizing a FlexPod Virtual Desktop solution for a customer with 500 virtual desktops in a shared Remote Desktop Services (RDS) topology.

In this scenario, which Cisco best practice should you use?

- A. You should avoid over-committing physical CPU resources for virtual machines
- B. You should avoid placing more than 20 users per physical host
- C. You should avoid changing the virtual host disk queue depth
- D. You should avoid multiple vCPUs per individual virtual machine

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 11

What will happen as a result of executing the following ACL?

```
redirect "www.mycorp.com" url www.netapp.com
```

- A. Requests for www.mycorp.com will be rewritten using the information at www.netapp.com.
- B. Requests for www.netapp.com will be redirected to www.mycorp.com.
- C. Requests for either www.mycorp.com or www.netapp.com will be redirected to the NetCache.
- D. Requests for www.mycorp.com will be redirected to www.netapp.com.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 12

Network Appliance maintains a record of customer product information on the NOW site and this data is _____.

- A. available only during business hours
- B. only available to authorized users
- C. available to anyone with NOW access
- D. only available to NetApp support staff

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 13

For FI 6248 with a GEM module, what is the possible assignment of ports for native Fibre Channel and Ethernet?

- A. Eth ports: 1-21, Fibre Channel ports. 22-48
- B. Eth ports: 1-21, 33-48, Fibre Channel ports. 22-32
- C. Eth ports: 1-18, 33-40, Fibre Channel ports. 19-32, 41-48
- D. Eth ports: 1-16, 41-48, Fibre Channel ports. 17-40

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 14

A customer is evaluating management tools for a new FlexPod Infrastructure. They desire a tool that can orchestrate the provisioning of UCS compute nodes, NetApp storage, and VMware networking.

Which tool satisfies the requirements of this customer's heterogeneous environment?

- A. NetApp OnCommand Insight
- B. NetApp OnCommand Unified Manager
- C. UCS Director
- D. UCS Central

Answer: [C \(LEAVE A REPLY\)](#)

NEW QUESTION: 15

You want to deploy Cisco UCS Fabric Interconnects in end-host mode.

In this scenario, which statement is true?

- A. Spanning Tree Protocol is executed on both the uplink ports and the server ports.
- B. MAC address learning occurs on all ports.
- C. Links are active-active regardless of the number of uplink switches.
- D. A change from traditional Ethernet switch mode to end-host mode can be done without reboot.

Answer: [D \(LEAVE A REPLY\)](#)

NEW QUESTION: 16

Which TWO of the following statements are equivalent?

- A. `set config.http.ports // 8080 , 8081 \\
B. set config.http.ports "8080" "8081"`
- C. `set config.http.ports \\
D. set config.http.ports "8080 , 8081"`

Answer: [B,C \(LEAVE A REPLY\)](#)

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam!
Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**

Special Discount: Freepdfdumps)

NEW QUESTION: 17

Which of the following options log only reports displays Web request data?

- A. Web Access
- B. Web Details
- C. Messages
- D. Web Server Acceleration

Answer: B (LEAVE A REPLY)

NEW QUESTION: 18

During a design meeting, a customer states that their goal is to deliver continuous availability across both network and storage during business continuity events. The customer has two data centers that are 80 km apart, and they want the configuration to be as logically unified across both sites as possible.

In this scenario, which FlexPod data protection solution achieves this goal?

- A. FlexPod with NetApp Cloud Sync
- B. FlexPod with NetApp SnapCenter
- C. FlexPod with NetApp FabricPool
- D. FlexPod with NetApp MetroCluster IP

Answer: D (LEAVE A REPLY)

NEW QUESTION: 19

Which two statements are correct regarding how the VM-FEX feature extends Cisco fabric technology to a virtual machine? (Choose two.)

- A. Each virtual machine includes a dedicated interface on the parent switch.
- B. VM-FEX ports can operate in 10 different modes.
- C. The server adapter is divided into a single vNIC.
- D. All virtual machine traffic is sent directly to the dedicated interface on the switch.

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 20

The configure "Shared User Hosts" feature under the Appliance Manager's Setup > FTP > Caching Behavior is used to specify:_____ .

- A. FTP servers from which fetched objects will be cached and served without a user-specific key requirement in order to increase the caching efficiency
- B. a subset of FTP servers that can be bound to a shared virtual IP address in order to increase overall caching efficiency
- C. a shared IP address that all requesting clients will use to circumvent any authentication or user-specific key requirements on the backend FTP servers
- D. a subset of FTP servers that will be accelerated by the NetCache appliance

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 21

You are designing a FlexPod solution and would like to configure ESXi hosts for SAN boot over FCoE.

Which switch would you use for zoning in this architecture?

- A. Nexus 7000
- B. Nexus 3000
- C. Nexus 9000
- D. Nexus 1010

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 22

Which two statements are true about VMware vCenter Server capabilities? (Choose two.)

- A. It auto-scales resources based on application load.
- B. It allows you to perform rapid cloning of virtual machines.
- C. It configures host profiles to simplify ESXi host configurations.
- D. It applies virtual server guest operating system updates and patches.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 23

A customer wants to deploy a FlexPod solution that involves directly connecting the NetApp AFF storage using the FCoE protocol to the Cisco UCS Fabric Interconnects.

In this scenario, which Cisco UCS Fibre Channel mode would be used to accomplish this task?

- A. trunk mode
- B. switching mode
- C. access mode
- D. end host mode

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 24

State whether the following statement is true or false. The backup/restore option in the Maintenance section of the Appliance Manager can possibly be used to restore and backup files of configuration type only.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 25

Where would the best place to find information about log headers, such as x-cs-headerlength?

- A. Administration Guide
- B. Guide to Caching Protocols and Services
- C. Deployment Guide
- D. Guide to MessagesandLogfile Entries

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 26

Which tool may be used to determine the optimal UCS hardware configurations for SAP, Oracle, and Microsoft Enterprise Applications FlexPod solutions?

- A. Cisco Resource Comparison Tool
- B. Cisco UCS Sizer for Enterprise Applications
- C. Microsoft Assessment and Planning (MAP) Toolkit
- D. NetApp Solution Builder

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 27

State whether the following statement is true or false. Disk ID is represented in x.y format, where x refers to the host adaptor and y refers to the disk ID number.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 28

You are designing a multi-site FlexPod Datacenter solution for a customer using MetroCluster over IP. The design should include a single set of compliant switches for the environment.

Which two features are required to satisfy this requirement? (Choose two.)

- A. support for an MTU size of 9216
- B. support for unified switch ports
- C. support for Fibre Channel ports
- D. support for QoS

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 29

Via which of the following can the console password be changed?

- A. the Appliance Manager

- B. rsh
- C. the console
- D. floppy disk

Answer: C (LEAVE A REPLY)

NEW QUESTION: 30

You want to ensure minimal disruption to the UCS fabric in the case of a port failure between the blade chassis and the Fabric Interconnects of your FlexPod configuration.

Which industry best practice would you implement as a global configuration to accomplish this task?

- A. Configure the chassis/FEX discovery policy to use N+1 mode.
- B. Configure the chassis/FEX discovery policy to use Discrete mode.
- C. Leave the chassis/FEX discovery policy in the default configuration.
- D. Configure the chassis/FEX discovery policy to use Port Channel mode.

Answer: (SHOW ANSWER)

NEW QUESTION: 31

A customer has reviewed the latest vSphere CVD and asks you if they can use their older Cisco servers in the new FlexPod solution and still have supported configuration.

Which statement is true in this scenario?

- A. FlexPod configurations are fully supported if they follow a specific Cisco Validated Design.
- B. FlexPod configurations are fully supported if they follow a specific NetApp Verified Architecture.
- C. FlexPod configurations are fully supported regardless of the equipment used.
- D. FlexPod configurations are fully supported if they follow the technical specifications and compatibility matrices.

Answer: A (LEAVE A REPLY)

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam!
Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**

Special Discount: Freepdfdumps)

NEW QUESTION: 32

An administrator is designing a FlexPod with the Nexus 5548UP series switches to SAN boot all of the ESXi hosts over FCoE, and attach to the VM datastores over NFS.

In this scenario, which license will be required on the Nexus switches?

- A. Storage Protocols Package
- B. Network Services Package
- C. FabricPath Services Package
- D. FCoE NPV Package

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 33

What MTU setting should be configured for VMware ESXi VMkernel Ports and Virtual Switches in a FCoE boot from SAN environment?

- A. 1492
- B. 9000
- C. 9216
- D. 1500

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 34

A customer with a FlexPod Datacenter solution wants to enable user access on UCS Manager. In this scenario, which three authentication methods would be configured? (Choose three.)

- A. Workgroup
- B. Active Directory
- C. LDAP
- D. Local
- E. NetBIOS

Answer: B,D,E ([LEAVE A REPLY](#))

NEW QUESTION: 35

Under what circumstance can a Cisco Nexus 5548 perform an ISSU (nondisruptive)?

- A. When the STP Bridge Assurance feature is running on a link other than the VPC peer link.
- B. When configured for VPCs
- C. When an STP-enabled switch is connected downstream
- D. When configured for L3

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 36

What is the traceroute command used for?

- A. show the state of each interface
- B. print the route packets take to a network host
- C. report interface activity in Kbps
- D. display a list of active sockets for each protocol

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 37

The correct manner in which to open a Network Appliance support ticket is to _____ at the NOW site?

- A. Submit a Case
- B. Submit a support ticket
- C. Submit a RMA
- D. Submit a BURT

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 38

Cisco UCS Manager may be used to manage which four tasks within a Cisco UCS domain?
(Choose four)

- A. Management of non-Cisco x86 systems
- B. Cisco UCS resource management including WWN addresses, MAC addresses, UUIDs, and bandwidth
- C. Install software applications, such as databases, application server software, or web servers
- D. Cisco UCS hardware including the chassis, servers, fabric interconnects, and i/o modules
- E. Deployment of a Windows or Linux Operating system
- F. Deploy patches for software, such as an OS or an application
- G. Network administration such as creating VLANs, uplink ports, port channels and LAN PIN groups
- H. SAN configuration tasks such as creating VSANs, QoS classes and definitions, and port channels.

Answer: B,D,G,H ([LEAVE A REPLY](#))

NEW QUESTION: 39

An ACI customer would like to enable devices from one Endpoint Group to talk to another Endpoint Group.

Which ACI construct is required to enable this capability?

- A. Contract
- B. Bridge Domain
- C. Application Profile
- D. Endpoint

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 40

With Data ONTAP 8.2 or later, a two-node cluster has which two connections? (Choose two.)

- A. 4x 10GbE Ethernet connections cross connected on each node for the Cluster interconnect
- B. 2x Infiniband connections cross connected on each node for the Cluster interconnect
- C. 2x connections for HA Pair storage failover
- D. 4x connections for HA Pair storage failover

E. 2x 10GbE Ethernet connections cross connected on each node for the Cluster interconnect

Answer: C,E ([LEAVE A REPLY](#))

NEW QUESTION: 41

A customer wants to design virtual machines provisioned across their VMware vSphere cluster. They need to leverage resource sharing and load balancing of their virtual machines.

Which VMware feature satisfies these requirements?

- A. VMware vMotion
- B. VMware DRS
- C. VMware Fault Tolerance
- D. VMware Storage vMotion

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 42

How many cluster interconnect switch(es) are required for a 4-node NetApp cluster?

- A. 1
- B. 2
- C. 6
- D. 4

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 43

Which statement is true about the capabilities of Cisco UCS Manager?

- A. It uses only manual discovery to detect, inventory, manage, and provision system components.
- B. It supports Cisco UCS B-Series blades and not C-Series rack servers.
- C. It provides policy-driven management to programmatically control server, network, and storage resources.
- D. It manages servers up to 50 blades per UCS domain.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 44

One of the below ACLs will enable the allowance requests from Engineering groups to www.netapp.com, which one is it?

- A. allow groupname "engineering" and server-name www.netapp.com
- B. allow group "engineering" and server-domain www.netapp.com
- C. allow groupname "engineering" and server-name matches "\.netapp\.com\$"
- D. allow group "engineering" and server-name www.netapp.com

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 45

What are three requirements to receive support through Cisco Solution Support? (Choose three.)

- A. Only Cisco B-Series and C-Series servers within the FlexPod environment must be covered by Cisco Solution Support
- B. A fully operational FlexPod environment with major functions in operation.
- C. All Cisco products within the FlexPod environment must be covered by Cisco Solution Support.
- D. Valid production-level support agreements for all non-Cisco products within the FlexPod environment.
- E. All Cisco and NetApp products within the FlexPod environment must be covered by Cisco Solution Support.

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 46

Which Cisco UCS modular LAN on a motherboard (mLOM) adapter provides two ports of 40-Gbps Ethernet or eight ports of 10-Gbps Ethernet with Fibre Channel over Ethernet (FCoE) capability?

- A. VIC 1280
- B. VIC 1340
- C. VIC 1380
- D. VIC 1240

Answer: C ([LEAVE A REPLY](#))

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam! Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**

Special Discount: [Freepdfdumps](#))

NEW QUESTION: 47

Which traffic through a UCS 6200 cluster can be in Active-Standby mode?

- A. Data and management traffic
- B. FHRP
- C. Data traffic only
- D. Management traffic only

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 48

Which one of the following object types are not cacheable?

- A. DNS A records
- B. VOD MPEG4 Streams


C. VOD MMS Streams

D. HTTP 200 OK responses

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 49

Exhibit:

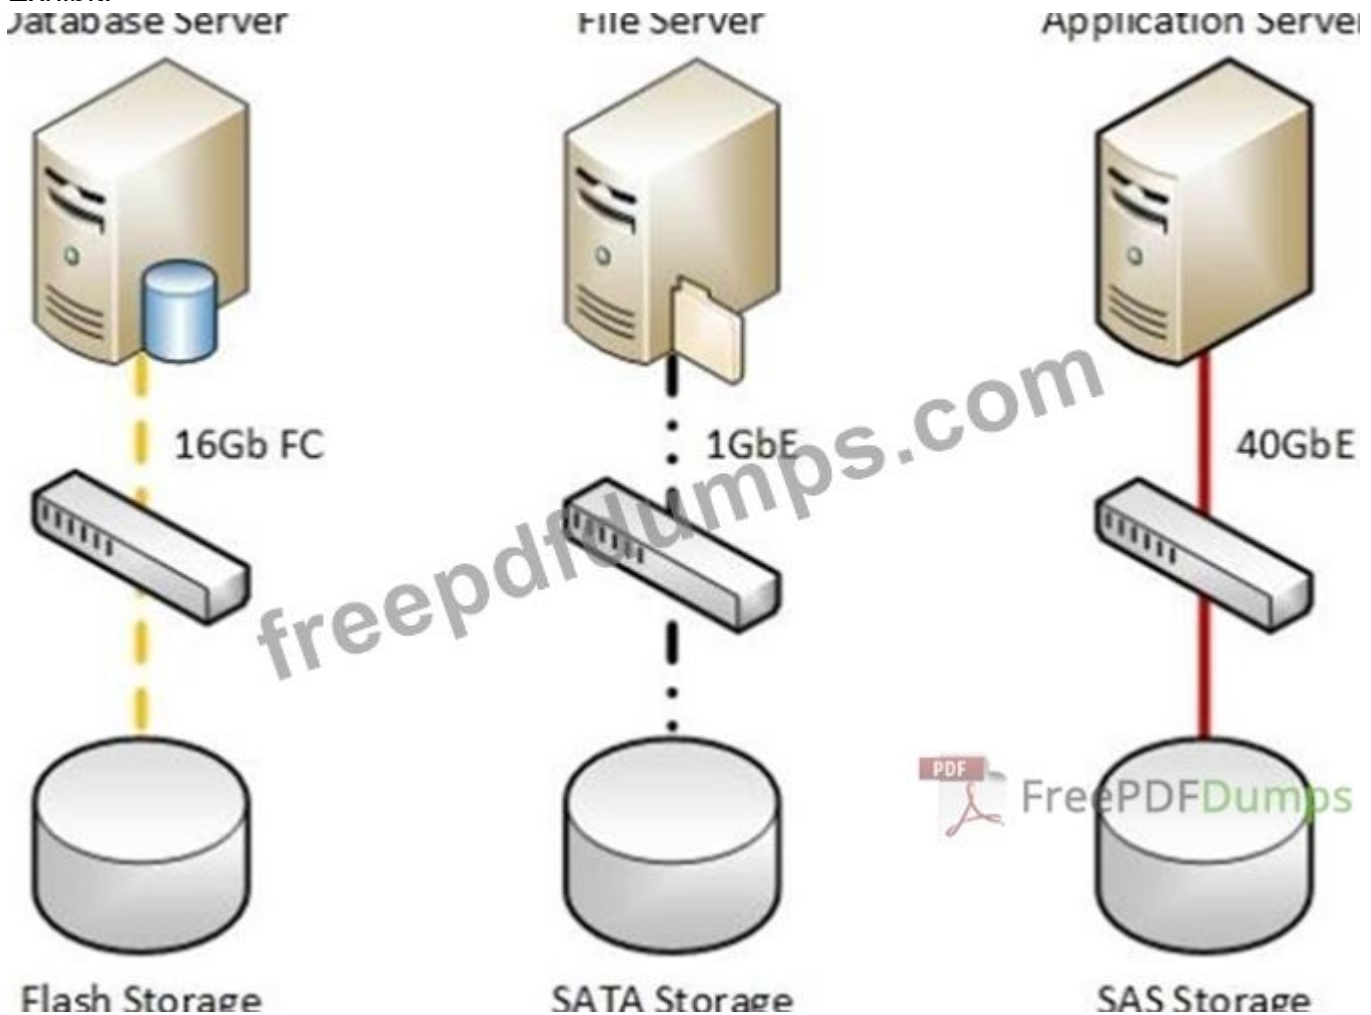

Your customer wants to consolidate their multiple data center applications into a single FlexPod solution. The customer wants to maintain the current network protocols and storage tiers.

Referring to the exhibit, which set of FlexPod components satisfies the requirements?

A. Cisco UCS 6324 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9000 Series, Cisco MDS 9000, NetApp AFF A800, and NetApp FAS2700

B. Cisco UCS 6332-16 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9000 Series, Cisco MDS 9000, NetApp AFF A800, and NetApp FAS8200

C. Cisco UCS 6296 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9000 Series, Cisco MDS 9000, NetApp AFF A800, and NetApp FAS8200

D. Cisco UCS 6332-16 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9000 Series, Cisco MDS 9000, NetApp AFF A800, and NetApp FAS2700

Answer: **C** ([LEAVE A REPLY](#))

NEW QUESTION: 50


One of the services below cannot be categorized as a service supported by ICAP, which option is it?

- A. Active content stripping
- B. Virus scanning of content received through HTTP.
- C. URL filtering
- D. Virus scanning of email content

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 51

Refer to the exhibit.

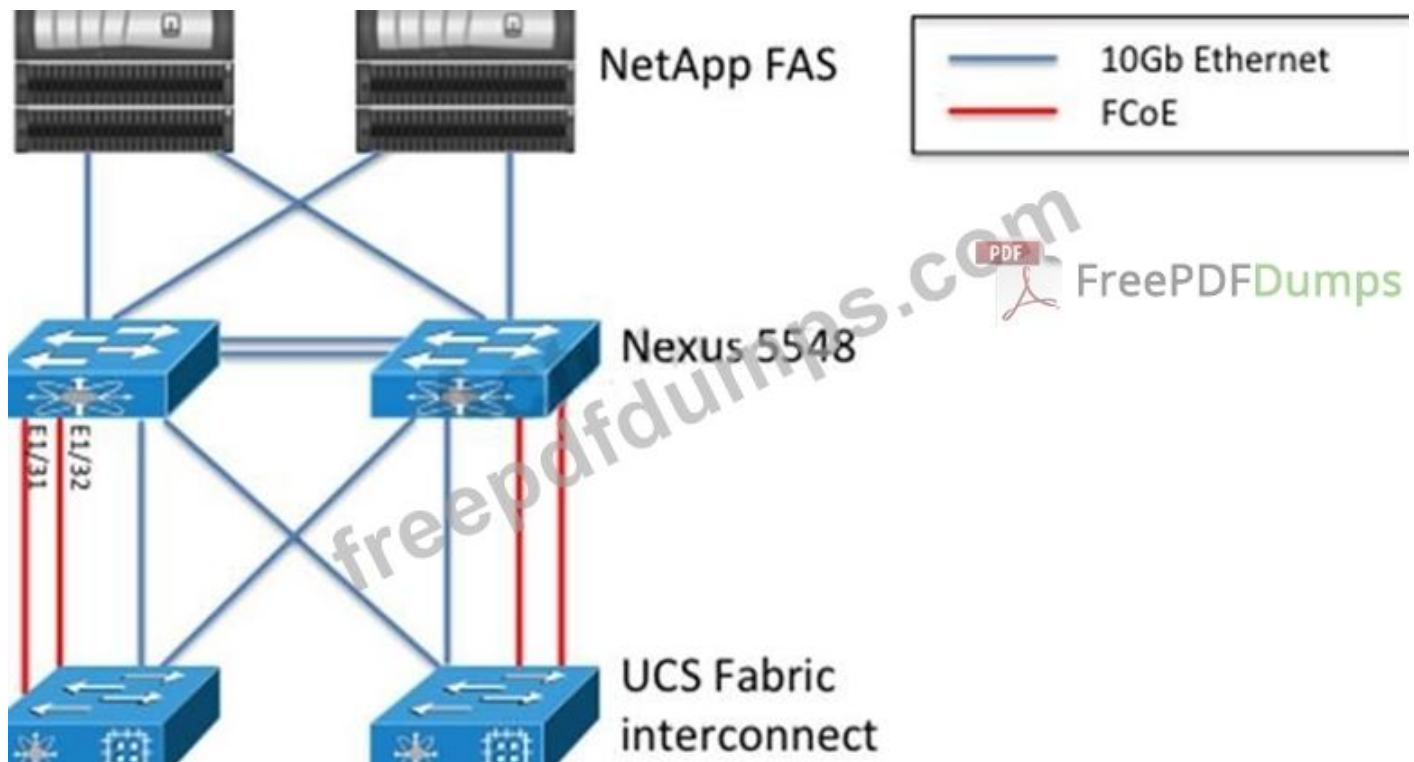

What would be the correct configuration for the ports labeled?

- A. `vlan 35fcoe vsan 35int eth1/31channel-group 15 mode activeint eth 1/32channel-group 15 mode activeint portchannel15switchport mode trunkswitchport trunk allowed vlan 35spanning-tree port type edge trunkint vfc15bind interface po15switchport trunk allowed vsan 35vsan databasevsan 35 interface vfc15`
- B. `int eth1/31-32channel-group 15 mode activeint po15switchport mode access vsan 45vsan databasevsan 45 interface po15`
- C. `vlan 35fcoe vsan 45int eth1/31-32channel-group 15 mode activeint po15switchport access vlan 35int vfc15bind interface po15switchport trunk allowed vsan 45vsan databasevsan 45 interface vfc15`
- D. `int eth1/31channel-group 15 mode activeint eth 1/32channel-group 15 mode activeint po15switchport mode trunkswitchport trunk allowed vsan 45spanning-tree port type edge trunkvsan databasevsan 45 interface po15`

E. vlan 35
cofcoe vsan 45
int eth1/31-32
channel-group 15 mode active
int po15
switchport mode trunk
switchport trunk allowed vlan 35
switchport trunk allowed vsan 45
spanning-tree port type edge
trunk
vsan database
vsan 45 interface po15

Answer: A (LEAVE A REPLY)

NEW QUESTION: 52

A customer has a FlexPod configuration that supports FC and uses Cisco MDS switches. The customer wants to add a 48-Port 32 Gbps Advanced Fibre Channel Switching blade to support both 32 Gbps FC and 32 Gbps NVMe-oF.

In this scenario, which Cisco switch is appropriate?

- A. MDS 9148S
- B. MDS 9706
- C. MDS 9250i
- D. MDS 9396S

Answer: A (LEAVE A REPLY)

NEW QUESTION: 53

The flush cache command _____.

- A. does not remove locked objects
- B. can only be used from the command line interface
- C. reduces disk space utilization
- D. does not reduce disk space utilization

Answer: D (LEAVE A REPLY)

NEW QUESTION: 54

You want to add a customer's NetApp storage controllers into their Cisco Intersight management portal.

In this scenario, which IP address would you choose to add?

- A. NetApp Active IQ Unified Manager IP address
- B. NetApp cluster IP address
- C. NetApp Virtual Storage Console IP address
- D. NetApp SVM management IP address

Answer: A (LEAVE A REPLY)

NEW QUESTION: 55

Which of the following are supported interface types?

- A. ATM
- B. Gigabit Ethernet, copper
- C. 10/100 Ethernet
- D. Gigabit Ethernet, fiber

Answer: B,C,D (LEAVE A REPLY)

NEW QUESTION: 56

The FlexPod Data Center with VMware vSphere 5.1 solution utilizes a clustered file system that allows multiple hosts simultaneous read and write access to a single volume.

What is the name of this file system?

- A. VMFS
- B. VHDX
- C. FAT
- D. NTFS

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 57

Which of the following TWO statements are FALSE?

- A. The HTTP log file can be pushed to a remote FTP server in compressed format
- B. The Messages log file can be pushed to a remote FTP server at scheduled intervals
- C. The HTTP log file cannot be pushed to a remote HTTPS server at scheduled intervals.
- D. The Messages log file cannot be pushed to a remote FTP server in compressed format.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 58

You are designing a new bare metal FlexPod solution for an Oracle RAC environment and want to leverage online resources to ensure your overall design is following FlexPod design best practices.

In this scenario, which validated resource would you use for your design?

- A. Oracle Design Considerations for Oracle RAC
- B. NetApp Interoperability Matrix Tool
- C. VMware Deployment Guide for Oracle Database
- D. Cisco Validated Design document for Oracle RAC

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 59

Which of the following must you successfully specify when configuring the NTLM authentication?

- A. UNIX computer to use
- B. Windows domain controller to use
- C. None of the above
- D. RADIUS server

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 60

Which connectivity mode for Cisco UCS C-Series Rack-Mount Server management is supported beginning with Cisco UCS Manager release version 2.1 and above?

- A. Dual-wire Management
- B. Side Frame management
- C. Single-wire Management
- D. Quad-wire Management

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 61

You have a customer that wants to deploy a new data center environment and take advantage of server portability. You propose that they use Cisco UCS servers to take advantage of stateless computing operations.

In this scenario, which Cisco UCS feature would help the customer achieve their objective?

- A. Service Profiles
- B. MAC address pools
- C. SEL logs
- D. VSANs

Answer: A ([LEAVE A REPLY](#))

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam! Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**

Special Discount: [Freepdfdumps](#))

NEW QUESTION: 62

The storage administrator must change the vHBA settings bound to a template associated with a production server.

What happens when the settings are reconfigured in this scenario?

- A. The vHBA template is deleted from UCS Manager.
- B. The service profile template that is associated with the server is initialized.
- C. The vHBA configuration change does not affect LUN access.
- D. The server that is associated with the service profile reboots.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 63

You want to ensure the uniqueness of the Cisco UCS WWNNs and WWPNNs in the SAN for a FlexPod solution.

In this situation, Cisco recommends using which WWN prefix for all blocks in a pool?

- A. 40:00:00:25:B5:XX:XX:XX

- B. 30:00:00:25:B5:XX:XX:XX
- C. 20:00:00:25:B5:XX:XX:XX
- D. 60:00:00:25:B5:XX:XX:XX

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 64

Which two types of Cisco UCS servers are available to be used with a FlexPod Express deployment? (Choose two.)

- A. Cisco UCS S-Series
- B. Cisco UCS E-Series
- C. Cisco UCS C-Series
- D. Cisco UCS B-Series

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 65

The system messages are _____.

- A. written to a log file that can be rotated at any time
- B. written to a log file that can be pushed to a remote FTP server at scheduled intervals
- C. printed on the console and can be sent in "real time" to a remote syslog server
- D. written to a log file that can be rotated at scheduled intervals

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 66

A customer wants a FlexPod solution that is designed for high performance applications and that will support

32 Gbps Fibre Channel block storage.

In this scenario, which two components should you recommend to the customer? (Choose two.)

- A. NetApp AFF A800
- B. Cisco Nexus 9504
- C. NetApp AFF C190
- D. Cisco Nexus 93180YC-FX

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 67

You have designed a FlexPod configuration with VXLAN configured on Cisco Nexus 9000 Series switches operating in NX-OS mode.

Which two statements are true in this scenario? (Choose two.)

- A. VXLAN is supported only on Cisco MDS 9000 Series switches
- B. VXLAN is a Layer 2 overlay scheme over a Layer 3 network
- C. VXLAN supports the Spanning Tree Protocol for loop prevention
- D. VXLAN segments are independent of the underlying network topology

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 68

A customer plans to decommission a Cisco UCS B-Series server, as part of this action, the customer disassociates the service profile from the currently assigned server.

Which action is performed by UCS Manager in this scenario?

- A. It recalculates the power allotment for each blade server within the chassis
- B. It reboots the primary Fabric Interconnect immediately
- C. It reboots the secondary Fabric Interconnect immediately
- D. It powers down the server

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 69

The backup/restore options in the Maintenance section of the Appliance Manager are used to backup and restore _____.

- A. specified cached data
- B. configuration files only
- C. log files and configuration files
- D. log files only

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 70

You have determined that a FlexPod Express solution, based on a NetApp FAS2552A using an iSCSI boot for the compute layer, is the preferred solution for your customer.

In this scenario, which two components are required in the NetApp storage system? (Choose two.)

- A. two 8-Gbps Fibre Channel ports
- B. FC license
- C. iSCSI license
- D. two 10-Gbps Ethernet ports

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 71

A customer is designing a FlexPod environment and is preparing for an ESXI host installation. High availability is a requirement for the FlexPod design. The ESXI servers will be built with new iSCSI boot LUNs.

Which two NetApp design components are required for this task? (Choose two.)

- A. iSCSI LIF IP addresses
- B. boot LUN UUID
- C. boot LUN name
- D. SVM target IQN

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 72

What are three ways to configure a UCS 5108 server chassis power supply? (Choose three.)

- A. n+1 redundant
- B. non redundant
- C. n+n redundant
- D. pooled
- E. grid redundant

Answer: A,B,E ([LEAVE A REPLY](#))

NEW QUESTION: 73

A customer asks you to design a Red Hat Enterprise Linux OpenStack Platform for pNFS storage. In this scenario, which services driver is required to connect to the customer's NetApp storage?

- A. Ceph
- B. LVM
- C. NFS
- D. NetApp

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 74

What is the maximum number of chassis supported under a single UCS Manager domain?

- A. 10
- B. 40
- C. 20
- D. 30

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 75

According to FlexPod CVDs, what is the recommended MTU size for iSCSI logical interfaces (LIFs) on the NetApp Storage Virtual Machine (SVM)?

- A. 3,000
- B. 1,500
- C. 9,000
- D. 9,124

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 76

Which of the following options best describes what the configure "Shared User Hosts" feature that is found under Appliance Manager's Setup > FTP > Caching Behavior is used for?

- A. a subset of FTP servers that can be bound to a shared virtual IP address in order to increase overall caching efficiency
- B. a shared IP address that all requesting clients will use to circumvent any authentication or user-specific key requirements on the backend FTP servers
- C. a subset of FTP servers that will be accelerated by the NetCache appliance
- D. FTP servers from which fetched objects will be cached and served without a user-specific key requirement in order to increase the caching efficiency

Answer: D (LEAVE A REPLY)

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam! Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**)

Special Discount: Freepdfdumps)

NEW QUESTION: 77

Which three configurations are supported in a FlexPod when using a Cisco UCS 6324 Fabric Interconnect? (Choose three.)

- A. a NetApp storage controller direct connected to UCS 6324 Fabric Interconnect using 10-GB Ethernet
- B. a NetApp storage controller connected to Cisco Nexus 5000, which is in turn connected to a UCS 6324 Fabric Interconnect, all using FC
- C. a NetApp storage controller connected to a Cisco MDS, which is in turn connected to a UCS 6324 Fabric Interconnect, all using FC
- D. a NetApp storage controller direct connected to a UCS 6324 Fabric Interconnect using 40 GB Ethernet
- E. a NetApp storage controller direct connected to a UCS 6324 Fabric Interconnect using FC

Answer: A,C,E (LEAVE A REPLY)

NEW QUESTION: 78

Which of the following statements best describes what occurs with system messages?

- A. written to a log file that can be pushed to a remote FTP server at scheduled intervals
- B. written to a log file that can be rotated at scheduled intervals
- C. printed on the console and can be sent in "real time" to a remotesyslog server
- D. written to a log file that can be rotated at any time

Answer: (SHOW ANSWER)

NEW QUESTION: 79

The traceroute command is used to _____.

- A. print the route packets take to a network host
- B. report interface activity in Kbps
- C. display a list of active sockets for each protocol
- D. show the state of each interface

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 80

You need to design a FlexPod Datacenter solution that will support data replication between two data centers. The networking hardware must support the ability to extend Layer 2 Ethernet traffic over a routed Layer 3 infrastructure using Overlay Transport Virtualization (OTV), support Fibre Channel over Ethernet (FCoE), and support In Service Software Upgrades (ISSUs).

Which Cisco Nexus series hardware would you include in this design?

- A. Cisco Nexus 3000
- B. Cisco Nexus 9000
- C. Cisco Nexus 7000
- D. Cisco Nexus 5000

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 81

How do Cisco Fabric Interconnects in a FlexPod configuration share configuration information, status, and avoid "split brain" problems?

- A. Fabric Interconnects share information and status by using UCS Manager.
- B. Fabric Interconnects share information and status by using VLAN 1.
- C. Fabric Interconnects share information and status by using NetApp ONTAP.
- D. Fabric Interconnects share information and status by using ports L1 and L2.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 82

What must be done in order to add a user to the appliance database, which two of the following you must enter?

- A. access permissions
- B. password
- C. user name
- D. group

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 83

An administrator is designing a FlexPod backup solution that includes replication to a remote site that includes the capability to restore to a prior point in time.

In this scenario, which two technologies are required to accomplish this task? (Choose two.)

- A. NetApp FlexClone
- B. NetApp SnapMirror
- C. NetApp SnapRestore
- D. NetApp SyncMirror

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 84

A storage architect wants to replace a NetApp 7-mode system with a new NetApp clustered Data ONTAP system.

What are two new features available with this upgrade? (Choose two.)

- A. SnapMirror
- B. SnapProtect
- C. junction paths
- D. namespace

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 85

Which high-availability feature is supported by FlexPod with Unified Computing System Mini (UCS Mini) in a single chassis?

- A. blade and rack mount servers
- B. redundant Fabric Extenders
- C. redundant 6248 Fabric Interconnects
- D. redundant 6324 Fabric Interconnects

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 86

Which two features are supported with vSphere 6 Standard edition? (Choose two.)

- A. Storage vMotion
- B. Storage DRS
- C. vCenter Site Recovery Manager
- D. thin provisioning

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 87

You are designing your drive layout for a NetApp E-Series storage array. You want to minimize performance bottlenecks by spreading data, parity, and spare capacity across all available drives. In this scenario, which feature would accomplish this task?

- A. RAID-DP
- B. Dynamic Disk Pools
- C. FlexVols
- D. Virtual Storage Tiering (VST)

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 88

Which of the following commands would you make use of to view the available options for the showing config.http.acl command?

- A. showconfig.http.acl.
- B. config.acl help
- C. helpconfig.acl
- D. help

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 89


VMware vCenter Server Appliance v6.0 supports which two types of databases? (Choose two.)

- A. Oracle 12c
- B. SQL Server 2016
- C. vPostgres
- D. MySQL 5.7

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 90

Refer to the exhibit.

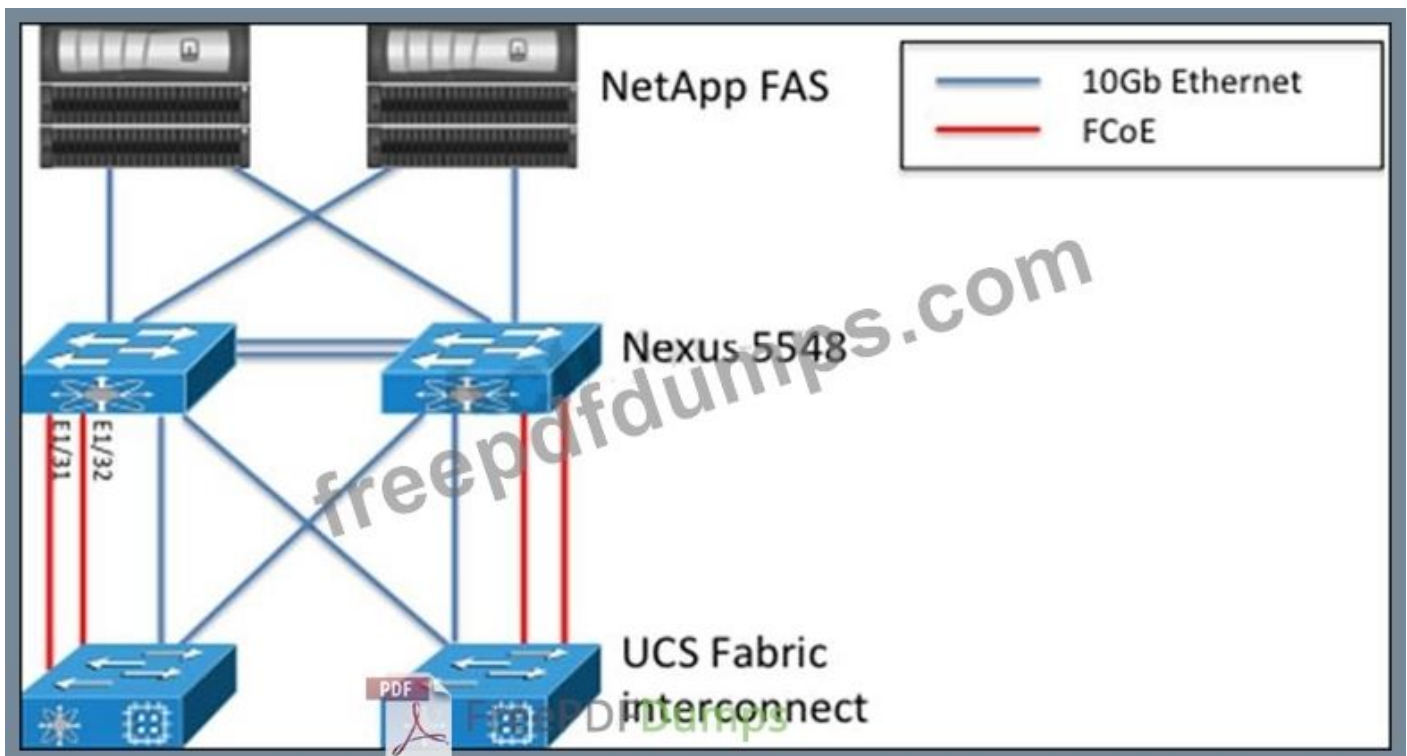

What would be the correct configuration for the ports labeled?

- A. int eth1/31channel-group 15 mode activeint eth 1/32channel-group 15 mode activeint po15switchport mode trunkswitchport trunk allowed vsan 45spanning-tree port type edge trunkvsan databasevsan 45 interface po15

- B.** int eth1/31-32channel-group 15 mode activeint po15switchport mode access vsan 45vsan databasevsan 45 interface po15
- C.** vlan 35fcoe vsan 45int eth1/31-32channel-group 15 mode activeint po15switchport access vlan 35int vfc15bind interface po15switchport trunk allowed vsan 45vsan databasevsan 45 interface vfc15
- D.** vlan 35fcoe vsan 35int eth1/31channel-group 15 mode activeint eth 1/32channel-group 15 mode activeint portchannel15switchport mode trunkswitchport trunk allowed vlan 35spanning-tree port type edge trunkint vfc15bind interface po15switchport trunk allowed vsan 35vsan databasevsan 35 interface vfc15
- E.** vlan 35fcoe vsan 45int eth1/31-32channel-group 15 mode activeint po15switchport mode trunkswitchport trunk allowed vlan 35switchport trunk allowed vsan 45spanning-tree port type edge trunkvsan databasevsan 45 interface po15

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 91

State whether the following statement is true or false. All defective parts require a RMA before to sending the product to Network Appliance.

- A.** False
- B.** True

Answer: **B** ([LEAVE A REPLY](#))

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam! Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**)

Special Discount: [Freepdfdumps](#))

NEW QUESTION: 92

What is the maximum aggregate traffic available to a half-width UCS B-Series blade in a 5108 Chassis with two 2208XP Fabric Extenders, Cisco VIC 1240 adapter, and Cisco Port Expander Card for VIC 1240?

- A.** 320 Gb
- B.** 80 Gb
- C.** 40 Gb
- D.** 120 Gb

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 93

You want to direct-connect NetApp storage to a UCS Mini over IP.

In this scenario, which storage protocol is supported?

- A. S3
- B. FC
- C. iSCSI
- D. CIFS

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 94

Which two LIFs are able to failover or migrate to other nodes in the cluster? (Choose two.)

- A. data LIF of protocol CIFS
- B. node management LIF
- C. data LIF of protocol NFS
- D. intercluster LIF
- E. data LIF of protocol iSCSI
- F. data LIF of protocol FCoE

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 95

You received from a customer the requirements shown below.

25 servers

25GbE connectivity

NFS and iSCSI protocols

30 TB flash storage

50 TB hybrid storage

In this scenario, which FlexPod solution would satisfy the requirements?

- A. Cisco UCS 6454 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9300 Series, NetApp AFF A400, and FAS2750
- B. Cisco UCS 6332 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9300 Series, NetApp AFF A400, and FAS8300
- C. Cisco UCS 6454 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9300 Series, NetApp AFF A400, and FAS8300
- D. Cisco UCS 6324 Fabric Interconnect, Cisco B-Series servers, Cisco Nexus 9300 Series, NetApp AFF A400, and FAS2750

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 96

You are configuring Cisco UCS servers for Fibre Channel SAN boot and want to perform zoning on your Cisco Nexus 5000 series switches.

Which statement is correct in this scenario?

- A. An iSCSI license on the NetApp storage controller is required.

- B. Fibre Channel zoning on the Nexus series switches is not supported and can only be done on the Fabric Interconnects.
- C. SAN links are required between the Fabric Interconnects and the Nexus 5000 switches.
- D. The corresponding FC ports on your NetApp storage array must be configured in LACP mode.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 97

You are asked to design a new FlexPod solution that will host VMware virtual machines using NFS datastores, file services using SMB, and NFS-mounted home directories. You need to ensure that the network traffic of these three use cases are isolated?

In this scenario, which supported end-to-end network topology would be used to accomplish this task?

- A. vPC
- B. VLAN
- C. VSAN
- D. VXLAN

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 98

A customer has configured a FlexPod solution and is experiencing issues with connectivity from the Cisco Nexus switches to the NetApp AFF controllers. The customer must verify connectivity using the FC protocol.

What are two ways to troubleshoot this problem? (Choose two.)

- A. Use the WWNN
- B. Use the FCID
- C. Use Domain ID
- D. Use the WWPN

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 99

A client has a FlexPod Datacenter solution with four active fabric links in port channel mode established between the Cisco Fabric Interconnects and the IOMs on a Cisco 5108 blade chassis.

The blade chassis is fully populated with Cisco UCS B200M5 blades. A worker in the data center inadvertently unplugs the fourth uplink cable from IOM-A while working in the rack.

In this scenario, what happens to the network traffic?

- A. Traffic is load-balanced within IOM-B.
- B. Traffic is load-balanced within IOM-A.
- C. Connectivity for servers 3, 4, 7, and 8 all fail over to IOM-B.
- D. There is a loss of connectivity for servers 4 and 8.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 100

A customer wants to extend a FlexPod configuration across multiple sites using FlexPod with NetApp MetroCluster. One requirement is to extend the L2 domain across sites to enable live migration for critical applications.

Which Nexus 7000 feature enables this migration?

- A. ACI
- B. OTV
- C. FabricPath
- D. ISSU

Answer: ([SHOW ANSWER](#))

Valid NS0-175 Dumps shared by Actual4test.com for Helping Passing NS0-175 Exam!
Actual4test.com now offer the **newest NS0-175 exam dumps**, the Actual4test.com NS0-175 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com NS0-175 dumps with Test Engine here:

https://www.actual4test.com/NS0-175_examcollection.html (277 Q&As Dumps, **30%OFF**

Special Discount: Freepdfdumps)