

Salesforce.PDI.v2024-08-31.q167

Exam Code:	PDI
Exam Name:	Platform Developer I (PDI)
Certification Provider:	Salesforce
Free Question Number:	167
Version:	v2024-08-31
# of views:	889
# of Questions views:	1670
https://www.freepdf.dumps.com/Salesforce.PDI.v2024-08-31.q167.html	

NEW QUESTION: 1

Which three resources in an Azure Component can contain JavaScript functions?

- A. Controllers
- B. Renderer
- C. helper
- D. Style
- E. Design

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 2

Considering the following code snippet:

```
public static void insertAccounts(List<Account> theseAccounts) {  
    for(Account thisAccount : theseAccounts){  
        if(thisAccount.website == null){  
            thisAccount.website = 'https://www.demo.com';  
        }  
    }  
    salesforce.insert(thisAccounts);  
}
```

When the code executes a DML exception is thrown.

How should the developer modify the code to ensure exceptions are handled gracefully?

- A. Implement the upsert DML statement.
- B. Remove null items from the list if Accounts.
- C. Implement Change Data Capture
- D. Implement a try/catch block for the DML.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 3

Which code in a Visualforce page and/or controller might present a security vulnerability?

- A. `<apex:outputText value="{!$CurrentPage.parameters.userInput}" />`
- B. `<apex:outputText escape="false" value="{!$CurrentPage.parameters.userInput}" />`
- C. `<apex:outputField value="{!ctrl.userInput}" />`
- D. `<apex:outputField escape="false" value="{!ctrl.userInput}" />`

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 4

A developer wants to mark each Account in a List<Account> as either or Inactive based on the LastModified field value being more than 90 days.

Which Apex technique should the developer use?

- A. A for loop, with a switch statement inside
- B. A Switch statement, with a for loop inside
- C. An If/else statement, with a for loop inside
- D. A for loop, with an if/else statement inside

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 5

What can used to delete components from production?

- A. An ant migration tool deployment with a destructivechanges XML file and an empty package .xml file
- B. A change set deployment with a destructivechanges XML file
- C. A change set deployment with the delete option checked
- D. An ant migration tool deployment with destructivechanges xml file and the components to delete in the package .xml file

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 6

A developer is creating an app that contains multiple Lightning web components.

One of the child components is used for navigation purposes. When a user click a button called.. component, the parent component must be alerted so it can navigate to the next page.

How should this be accomplished?

- A. Create a custom event.
- B. Fire a notification.
- C. Call a method in the Apex controller.
- D. Update a property on the parent.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 7

An after trigger on the account object performs a DML update operation on all of the child opportunities of an account. There are no active triggers on the opportunity object, yet a "maximum trigger depth exceeded" error occurs in certain situation. Which two reasons possibly explain the account trigger firing recursively? choose 2 answers

- A. Changes are being made to the account during an unrelated parallel save operation
- B. Changes to opportunities are causing roll-up summary fields to update on the account
- C. Changes are being made to the account during criteria based sharing evaluation
- D. Changes to opportunities are causing cross-object workflow field updates to be made on the account

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

A developer must write an Apex method that will be called from a Lightning component. The method may delete an Account stored in the accountRec variable.


Which method should a developer use to ensure only users that should be able to delete Accounts can successfully perform deletions?

- A. Account.isDeletable()
- B. accountRec.sObjectType.isDeletable()
- C. Schema.sObjectType.Account.isDeletable()
- D. accountRec.isDeletable()

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 9

Management asked for opportunities to be automatically created for accounts with annual revenue greater than \$1,000,000. A developer created the following trigger on the Account object to satisfy this requirement.

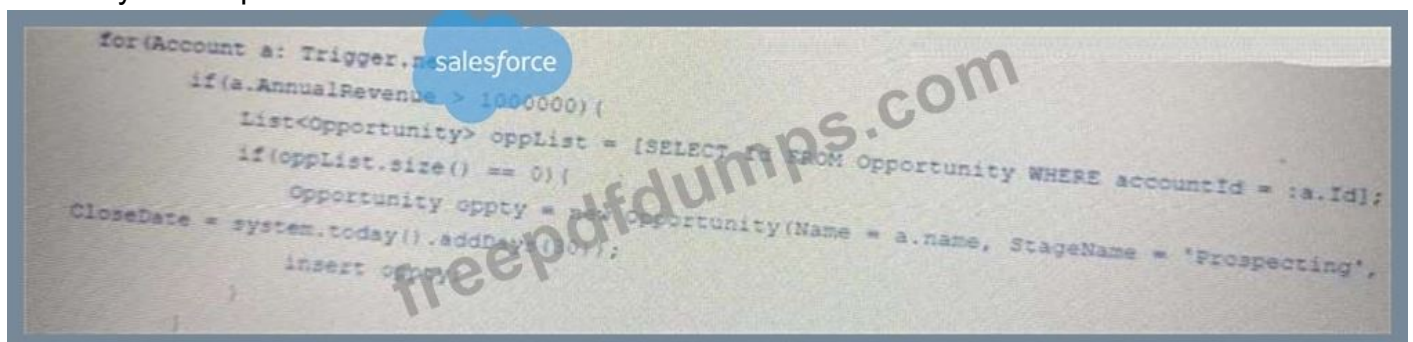

```
for(Account a: Trigger.new.salesforce)
    if(a.AnnualRevenue > 1000000){
        list<Opportunity> opplist = [SELECT * FROM Opportunity WHERE accountId = :a.Id];
        if(opplist.size() == 0){
            Opportunity oppty = new Opportunity(Name = a.name, StageName = 'Prospecting',
            CloseDate = system.today().addDays(30));
            insert oppty;
        }
    }
```

Users are able to update the account records via the UI and can see an opportunity created for high annual revenue accounts. However, when the administrator tries to upload a list of 179 accounts using Data Loader, It fails with system. Exception errors.

Which two actions should the developer take to fix the code segment shown above?

Choose 2 answers

- A. Move the DML that saves opportunities outside the for loop.
- B. Check if all the required fields for Opportunity are being added on creation.
- C. Use Database.query to query the opportunities.

D. Query for existing opportunities outside the for loop.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 10

Universal Containers stores the availability date on each Line Item of an Order and Orders are only shipped when all of the Line Items are available. Which method should be used to calculate the estimated ship date for an Order?

A. Use a Max Roll-Up Summary field on the Latest availability date fields.

B. Use a DAYS formula on each of the availability date fields and a COUNT Roll-Up Summary field on the Order.

C. Use a LATEST formula on each of the latest availability date fields.

D. Use a CEILING formula on each of the Latest availability date fields.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 11

A developer uses an 'after update' trigger on the Account object to update all the Contacts related to the Account. The trigger code shown below is randomly failing.

```
List<Contacts> theContacts = new List<Contacts>(); for(Account a : Trigger.new){ for(Contact c : [SELECT Id, Account_Date__c FROM Contact WHERE AccountId = :a.Id]){ c.Account_Date__c = Date.today(); theContacts.add(c); } } updates theContacts;
```

Which line of code is causing the code block to fail?

A. A SOQL query is located inside of the for loop.

B. An exception is thrown if Account_Date__c is null.

C. An exception is thrown if theContacts is empty

D. The trigger processes more than 200 records in the for loop.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 12

A developer needs to save a List of existing Account records named myAccounts to the database, but the records do not contain Salesforce Id values. Only the value of a custom text field configured as an External ID with an API name of Foreign_Key__c is known.

Which two statements enable the developer to save the records to the database without an Id? (Choose two.)

A. Upsert myAccounts(Foreign_Key__c);

B. Database.upsert (myAccounts, Foreign_Key__c);

C. Database.upsert(myAccounts).Foreign_Key__c;

D. Upsert myAccounts Foreign_Key__c;

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 13

A developer is asked to write helper methods that create test data for unit tests.

```
01: public TestUtils {
02:
03:     public static Account createAccount() {
04:         Account act = new Account();
05:         // ...set some fields on acct...
06:         return act;
07:     }
08:     //...other methods...
09: }
```

What should be changed in the Testutils class so that its methods are only usable by unit test methods?

- A. Change public to private on line 01.
- B. Add @IsTest above line 01.
- C. Add @IsTest above line 03,
- D. Remove static from line 03.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 14

An Approval Process is defined in the Expense_Item__c. A business rule dictates that whenever a user changes the Status to 'Submitted' on an Expense_Report__c record, all the Expense_Item__c records related to the expense report must enter the approval process individually. Which approach should be used to ensure the business requirement is met?

- A. Create a Process Builder on Expense_Report__c to mark the related Expense_Item__c as submittable and trigger on Expense_item__c to submit the records for approval.
- B. Create a Process Builder on Expense_Report__c with a 'Submit for Approval' action type to submit all related Expense_Item__c records when the criteria is met.
- C. Create a Process Builder on Expense_Report__c with an 'Apex' action type to submit all related Expense_Item__c records when the criteria is met.
- D. Create two Process Builder, one on Expense_Report__c to mark the related Expense_Item__c as submittable and the second on Expense_Item__c to submit the records for approval.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 15

A developer wants to override a button using Visualforce on an object.

What is the requirement?

- A. The controller or extension must have a PageReference method.
- B. The action attribute must be set to a controller method.
- C. The object record must be instantiated in a controller or extension.

D. The standardController attribute must be set to the object.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 16

Which actions can a developer perform using the Schema Builder? Choose 2 answers

- A. Create a custom object and define a lookup relationship on that object
- B. Create a view of objects and relationships without fields
- C. Create a view containing only standard and system objects.
- D. Create a custom field and automatically add it to an existing page layout.

Answer: A,C ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF** Special Discount: **Freepdfdumps**)

NEW QUESTION: 17

An Apex method, getAccounts, that returns a List of Accounts given a searchTerm, is available for Lightning Web components to use.

What is the correct definition of a Lightning Web component property that uses the getAccounts method?



- A. Option D
- B. Option C
- C. Option B
- D. Option A

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 18

A software company uses the following objects and relationships:

- * Case: to handle customer support issues
- * Defect_c: a custom object to represent known issues with the company's software

* case_Defect__c: a junction object between Case and Defector to represent that a defect is a customer issue. What should be done to share a specific Case-Defect__c record with a user?

- A. Share the Case_Defect__c record.
- B. Share the parent Case record.
- C. Share the parent Case and Defect__c records.
- D. Share the parent Defect__c record.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 19

In order to override a standard action with a visualforce page, which attribute must be defined in the

<apex:page> tag?

- A. Standardcontroller
- B. Controller
- C. Pagereference
- D. Override

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 20

Which SOQL query successfully returns the Accounts grouped by name?

- A. SELECT Name, Max(CreatedDate) FROM Account GROUP BY Name
- B. SELECT Id, Type, Max(CreatedDate) FROM Account GROUP BY Name
- C. SELECT Type, Name, Max(CreatedDate) FROM Account GROUP BY Name LIMIT 5
- D. SELECT Type, Max(CreatedDate) FROM Account GROUP BY Name

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 21

When a task is created for a contact, how can a developer prevent the task from being included on the activity timeline of the contact's account record?

- A. In activity settings, uncheck roll-up activities to a contact's primary account
- B. Create a task trigger to set the account field to NULL
- C. Use process builder to create a process to set the task account field to blank
- D. By default, tasks do not display on the account activity timeline

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 22

Which two statements are true about using the @testSetup annotation in an Apex test class?

Choose 2 answers

- A. The @testSetup annotation is not supported when the GisTest(SeeAllData=True) annotation is used.
- B. Test data is inserted once for all test methods in a class.

- C. Records created in the test setup method cannot be updated in individual test methods.
- D. A method defined with the @testSetup annotation executes once for each test method in the test class and counts towards system limits.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 23

How can a developer avoid exceeding governor limits when using an Apex Trigger?choose 2 answers

- A. By using Maps to hold data from query results.
- B. By using the Database class to handle DML transactions.
- C. By performing DML transactions on lists of SObjects.
- D. By using a helper class that can be invoked from multiple triggers.

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 24

A developer is creating a test coverage for a class and needs to insert records to validate functionality. Which method annotation should be used to create records for every method in the test class?

- A. @isTest(SeeAllData=True)
- B. @BeforeTest
- C. @TestSetup
- D. @PreTest

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 25

What are two characteristics related to formulas? Choose 2 answers.

- A. Fields that are used in a formula field can be deleted or edited without the formula.
- B. Formulas are calculated at runtime and are not stored in the database.
- C. Formula can reference themselves.
- D. Formulas can reference values in related objects.

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 26

The sales management team at Universal Container requires that the Lead Source field of the Lead record be populated when a.. converted.

What should be done to ensure that a user populates the Lead Source field prior to converting a Lead?

- A. Use a formula field.
- B. Create an after trigger on Lead.
- C. Use Lead Conversation field mapping.
- D. Use a validation rule.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 27

A developer created this Apex trigger that calls MyClass.myStartmethod:

```
trigger myTrigger on Contact(before insert)
{
    MyClass.myStaticMethod(trigger.new);
}
```

The developer creates a test method that calls MyClass.myStartmethod directly, resulting in 81% overall code coverage.

What happens when the developer tries to deploy the ... and two classes to production, assuming no other code exists?

- A. The deployment passes because both classes and the trigger were included in the deployment.
- B. The deployment fails because no assertions were made in the test method.
- C. The deployment passes because the Apex code has the required 75% code coverage.
- D. The deployment fails because the Apex trigger has no code coverage.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 28

How many levels of child records can be returned in a single SOQL query from one parent object?

- A. 5
- B. 1
- C. 3
- D. 7

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 29

A recursive transaction is limited by a DML statement creating records for these two objects:

1. Accounts
2. Contacts

The Account trigger hits a stack depth of 16.

Which statement is true regarding the outcome of the transaction?

- A. The transaction fails only if the Contact trigger stack depth is greater or equal to 16.
- B. The transaction succeeds and all the changes are committed to the database.
- C. The transaction fails and all the changes are rolled back.
- D. The transaction succeeds as long as the Contact trigger stack depth is less than 16.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 30

How many accounts will be inserted by the following block of code? `for(Integer i = 0 ; i < 500; i++) { Account a = new Account(Name='New Account ' + i); insert a; }`

0

```

87. Boolean odk;
Integer x;
if(abok=false;integer=x;){
X=1;
}elseif(abok=true;integer=x;){
X=2;
}elseif(abok!=null;integer=x;){
X=3;
}elseif{
X=4;}

```

A. X=4
B. X=8
C. X=9
D. X=10

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 31

Which two strategies should a developer use to avoid hitting governor limits when developing in a multi-tenant environment? (Choose two.)

- A. Use SOQL for loops to iterate data retrieved from queries that return a high number of rows.
- B. Use variables within Apex classes to store large amounts of data.
- C. Use collections to store all fields from a related object and not just minimally required fields.
- D. Use methods from the "Limits" class to monitor governor limits.

Answer: ([SHOW ANSWER](#)**)**

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 32

Refer to the following code that runs in an Execute Anonymous block:

```

for(List<Lead> theseLeads : [SELECT LastName, Company, Email FROM Lead LIMIT 20000]){
    for(Lead thisLead : theseLeads){
        if(thisLead.Email == null)
            thisLead.Email = assignGenericEmail(thisLead.LastName, thisLead.Company);
    }
    Database.Update(theseLeads,false);
}

```

- A. The total number of records processed as a result of DML statements will be exceeded.
- B. The total number of records processed as a result of DML statements will be exceeded

- C. The transaction will succeed and the first ten thousand records will be committed to the database.
- D. The total number of DML statements will be exceeded.
- E. In an environment where the full result set is returned, what is a possible outcome of this code?

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 33

A developer created a Visualforce page with a custom controller to show a list of accounts. The page uses the

<apex:SelectList> component, with a variable called "selection", to show the valid values for Account.Type.

The page uses an <apex:pageBlockTable> component to display the list of accounts, where the iteration variable is "acct". The developer wants to ensure that when a user selects a type on the <apex : selectList> component, only accounts with that type are shown on the page. What should the developer do to accomplish this?

- A. Create a component for each option and use a variable with hide parameter on the element.
- B. Add the Rendered={!Acct.type==selection} attribute to the pageBlockTable component
- C. Create multiple lists in the controller that represent the relevant accounts for each account type when the page loads, then reference the correct one dynamically on the pageBlockTable.
- D. Use the onChange event to update the list of accounts in the controller when the value changes, and then re-render the pageBlockTable.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 34

Which action can a developer perform in a before update trigger? (Choose 2)

- A. Delete the original object using a delete DML operation.
- B. Change field values using the Trigger.new context variable.
- C. Display a custom error message in the application interface.
- D. Update the original object using an update DML operation.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 35

Assuming that 'name' is a String obtained by an <apex:inputText> tag on a Visualforce page.

Which two SOQL queries performed are safe from SOQL injections? Choose 2 answers

- A. String query = '%' + name + '%';

List<Account> results = [SELECT Id FROM Account WHERE Name LIKE :query];

- B. String query = 'SELECT Id FROM Account WHERE Name LIKE \'' +

String.escapeSingleQuotes(name) + '%\";

List<Account> results = Database.query(query);

C. String query = 'SELECT Id FROM Account WHERE Name LIKE \'%" + name.noQuotes() + \'%\'"; List<Account> results = Database.query(query);

D. String query = 'SELECT Id FROM Account WHERE Name LIKE \'%" + name + \'%\'"; List<Account> results = Database.query(query);

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 36

A developer considers the following snippet of code:

```
Boolean isOK;
integer x;
String theString = 'Hello';

if (isOK == false && theString == 'Hello'){
    x = 1;
} else if (isOK == true && theString == 'Hello'){
    x = 2;
} else if (isOK != null && theString == 'Hello'){
    x = 3;
} else {
    x = 4;
}
```

Based on this code, what is the value of x?

- A. 3
- B. 2
- C. 1
- D. 4

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 37

Which type of code represents the Model in the MVC architecture on the Force.com platform?

- A. Custom JavaScript that processes a list of Account records.
- B. A Controller Extension method that uses SOQL to query for a list of Account records
- C. A Controller Extension method that saves a list of Account records
- D. A list of Account records returned from a Controller Extension method

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 38

Which tag should a developer include when styling from external CSS is required in a Visualforce page?

- A. Apex : stylesheet
- B. Apex : require
- C. Apex : includeScript
- D. Apex : includeStyle

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 39

A Salesforce developer wants to review their code changes immediately and does not want to install anything on their computer or on the org.

Which tool is best suited?

- A. Developer Console
- B. Salesforce Extension for VSCode
- C. Setup Menu
- D. Third-party apps from App Exchange

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 40

The following code snippet is executed by a Lightning web component in an environment with more than

2,000 lead records:

```
@AuraEnabled
public void static updateLeads() {
    for(Lead thisLead : [SELECT Origin__c FROM Lead]){
        thisLead.LeadSource = thisLead.Origin;
        update thisLead;
    }
}
```



Which governor limit will likely be exceeded within the Apex transaction?

- A. Total number of SOQL queries issued
- B. Total number of records processed as a result of DML statements
- C. Total number of DML statement issued
- D. Total number of records retrieved by SOQL queries

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 41


Universal Containers requires Service Representatives to update all Cases at least one every three days. To make sure of this policy is obeyed, a developer has been asked to implement a field that displays the number of days since the last Case update. What should the developer use to configure the solution?

- A. Process Builder
- B. Workflow rule
- C. Scheduled Apex Class
- D. Formula field

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 42

A developer wrote the following two classes:

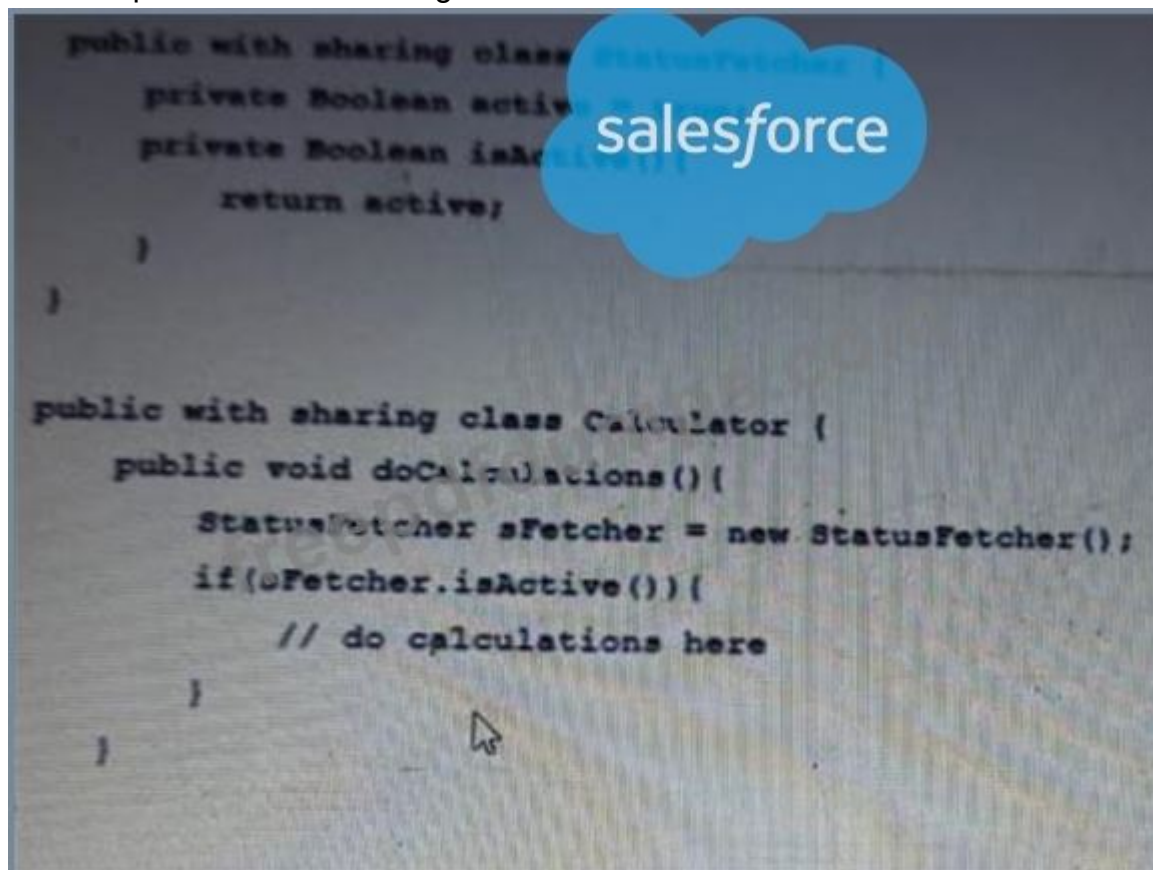

```
public with sharing class StatusFetcher {
    private Boolean active;
    private Boolean isActive() {
        return active;
    }
}

public with sharing class Calculator {
    public void doCalculations() {
        StatusFetcher sFetcher = new StatusFetcher();
        if(sFetcher.isActive()) {
            // do calculations here
        }
    }
}
```

The StatusFetcher class successfully compiled and saved. However, the Calculator class has a compile time error.

How should the developer fix this code?

- A. Change the class declaration for the Calculator class to public with inherited sharing.
- B. Make the doCalculations method in the Calculation class private.
- C. Make the isActive method in the StatusFetcher class public.
- D. Change the class declaration for the statusFetcher class to public with inherited sharing.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 43

Which approach should a developer use to add pagination to a Visualforce page?

- A. A StandardController
- B. The extensions attribute for a page
- C. The Action attribute for a page
- D. A StandardSetController

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 44

A business has a proprietary Order Management System (OMS) that creates orders from their website and fulfills the orders. When the order is created in the OMS, an integration also creates an order record in Salesforce and relates it to the contact as identified by the email on the order. As the order goes through different stages in the OMS, the integration also updates it in Salesforce. It is noticed that each update from the OMS creates a new order record in Salesforce. Which two actions will prevent the duplicate order records from being created in Salesforce?

Choose 2 answers

- A. Use the email on the contact record as an external ID.
- B. Use the order number from the OMS as an external ID.
- C. Write a before trigger on the order object to delete any duplicates.
- D. Ensure that the order number in the OMS is unique.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 45

An Apex method, `getAccounts`, that returns a list of Accounts given a `searchTerm`, is available for Lightning Web Components to use.

What is the correct definition of a Lightning Web Component property that uses the `getAccounts` method?

A.

```
@AuraEnabled(getAccounts, { searchTerm: '$searchTerm' })
accountList;
```

B. `accountList;`
`@wire(getAccounts, { searchTerm: '$searchTerm' })`

C. `accountList;`

`@wire(getAccounts, '$searchTerm')`

D. `accountList;`

`@AuraEnabled(getAccounts, '$searchTerm')`

`accountList;`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 46

Given the code below, what can be done so that recordcount can be accessed by a test class, but not by a non-test class? Public class mycontroller{ private integer recordcount; }

- A. Add the testvisible annotation to the mycontroller class
- B. Change recordcount from private to public
- C. Add a seealldata annotation to the test class
- D. Add the testvisible annotation to recordcount

Answer: D ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 47

Universal Containers decides to use exclusively declarative development to build out a new Salesforce application. Which three options should be used to build out the database layer for the application? Choose 3 answers

- A. Flow
- B. Custom Objects and Fields
- C. Triggers
- D. Relationships
- E. Roll-Up Summaries

Answer: B,D,E ([LEAVE A REPLY](#))

NEW QUESTION: 48

A developer uses a before insert trigger on the Lead object to fetch the Territory__c object, where the Territory__c.PostalCode__c matches the Lead.PostalCode. The code fails when the developer uses the Apex Data Loader to insert 10,000 Lead records. The developer has the following code block: Line-01: for (Lead l :

Trigger.new){Line-02: if (l.PostalCode != null) {Line-03: List<Territory__c> terrList = [SELECT Id FROM Territory__c WHERE PostalCode__c = :l.PostalCode];Line-04: if(terrList.size() > 0) Line-05: l.Territory__c = terrList[0].Id; Line-06: }Line-07: }Which line of code is causing the code block to fail?

- A. Line-05: The Lead in a before insert trigger cannot be updated.
- B. Line-01: Trigger:new is not valid in a before insert Trigger.
- C. Line-03: A SOQL query is located inside of the for loop code.
- D. Line-02: A NullPointerException is thrown if PostalCode is null.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 49

How should a custom user interface be provided when a user edits an Account in Lightning Experience?

- A. Override the Account's Edit button with Lightning component.
- B. Override the Account's Edit button with Lightning page.
- C. Override the Account's Edit button with Lightning Action
- D. Override the Account's Edit button with Lightning Flow

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 50

A developer needs to have records with specific field values in order to test a new Apex class. What should the developer do to ensure the data is available to the test?

- A. Use Test.Loaddata () and reference a static resource.
- B. Use SOQL to query the org for the required data.
- C. Use Anonymous Apex to create the required data.
- D. Use Test.Loaddata () and reference a CSV file

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 51

A credit card company needs to implement the functionality for a service agent to process damaged or stolen credit cards. When the customers call in, the service agent must gather many pieces of information. A developer is tasked to implement this functionality.

What should the developer use to satisfy this requirement in the most efficient manner?

- A. Lightning Component
- B. Approval process
- C. Apex trigger
- D. Screen-based flow

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 52

An Approval Process is defined In the Expense__item__c object. A business rule dictates that whenever a ... clients the Status to Submitted on an Expense_Item__c record related to the expense report must enter the approval process individually.

A developers asked to explore if this automation can be implemented without writing any Apex code.

Which statement is true regarding this automation request?

- A. This can only be automated with Apex code.
- B. The developer can use a record triggered flow with Actions.
- C. This approval step cannot be automated and must be done manually.

D. The developer can use Einstein Next Best Actions

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 53

A developer has a block of code that omits any statements that indicate whether the code block should execute with or without sharing. What will automatically obey the organization-wide defaults and sharing settings for the user who executes the code in the Salesforce organization?

- A.** Apex Controllers
- B.** HTTP Callouts
- C.** Apex Triggers
- D.** Anonymous Blocks

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 54

Which three options allow a developer to use custom styling in a Visualforce page? (Choose three.)

- A.** <apex:stylesheets>tag
- B.** A static resource
- C.** <apex:stylesheet> tag
- D.** Inline CSS
- E.** <apex:style>tag

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 55

Which two are true regarding a Dyno? Choose 2 answers

- A.** Has Ephemeral filesystems and is rebooted every 24 hours.
- B.** Is a lightweight Linux container used in a collection to run Heroku applications
- C.** Is a light weight VM used to run code on the Heroku Platform
- D.** Has the ability to sleep as a standard and performance Dyno

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 56

What is a benefit of using an after insert trigger over using a before insert trigger?

- A.** An after insert trigger allows a developer to insert other objects that reference the new record.
- B.** An after insert trigger allows a developer to make a callout to an external service.
- C.** An after insert trigger allows a developer to bypass validation rules when updating fields on the new record.
- D.** An after insert trigger allows a developer to modify fields in the new record without a query.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 57

Which two events need to happen when deploying to a production org? Choose 2 answers

- A. All triggers must have at least 1% test coverage.
- B. All Apex code must have at least 75% test coverage.
- C. All triggers must have at least 75% test coverage.
- D. All test and triggers must have at least 75% test coverage combined

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 58

What actions types should be configured to display a custom success message?

- A. Post a feed item.
- B. Close a case.
- C. Update a record.
- D. Delete a record.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 59

What are two benefits of using declarative customizations over code? Choose 2 answers What are two benefits of using declarative customizations over code?

- A. Declarative customizations generally require less maintenance.
- B. Declarative customizations automatically update with each Salesforce release.
- C. Declarative customizations automatically generate test classes.
- D. Declarative customizations automatically generate test classes.

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 60

A developer must modify the following code snippet to prevent the number of SOQL queries issued from exceeding the platform governor limit. public class without sharing

```
OpportunityService( public static List<OpportunityLineItem> getOpportunityProducts(Set<Id> opportunityIds){ List<OpportunityLineItem> oppLineItems = new List<OpportunityLineItem>(); for(Id thisOppld : opportunityIds){ oppLineItems.addAll([Select Id FROM OpportunityLineItems WHERE OpportunityId = :thisOppld]); } return oppLineItems; } }
```

The above method might be called during a trigger execution via a Lightning component. Which technique should be implemented to avoid reaching the governor limit?

- A. Refactor the code above to perform the SOQL query only if the Set of opportunityIds contains less than 100 Ids.
- B. Use the System.Limits.getQueries() method to ensure the number of queries is less than 100.
- C. Use the System.Limits.getLimitQueries() method to ensure the number of queries is less than 100.
- D. Refactor the code above to perform only one SOQL query, filtering by the Set of opportunityIds.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 61

In a single record, a user selects multiple values from a multi-select picklist.

How are the selected values represented in Apex?

- A. As a List<String> with each value as an element in the list
- B. As a Set<String> with each value as an element in the set
- C. As a String with each value separated by a semicolon
- D. As a String with each value separated by a comma

Answer: C ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 62

A developer is tasked to perform a security review of the ContactSearch Apex class that exists in the system. Whithin the class, the developer identifies the following method as a security threat:

```
List<Contact> performSearch(String lastName){ return Database.query('Select Id, FirstName, LastName FROM Contact WHERE LastName Like %'+lastName+'%'); }
```

What are two ways the developer can update the method to prevent a SOQL injection attack? Choose 2 answers

- A. Use variable binding and replace the dynamic query with a static SOQL.
- B. Use the @ReadOnly annotation and the with sharing keyword on the class.
- C. Use a regular expression on the parameter to remove special characters.
- D. Use the escapeSingleQuote method to sanitize the parameter before its use.

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 63

A developer writes a trigger on the Account object on the before update event that increments a count field.

A workflow rule also increments the count field every time that an Account is created or update. The field update in the workflow rule is configured to not re-evaluate workflow rules. What is the value of the count field if an Account is inserted with an initial value of zero, assuming no other automation logic is implemented on the Account?

- A. 3
- B. 1
- C. 4
- D. 2

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 64

A developer needs to provide a way to mass edit, update, and delete records from a list view. In which two ways can this be accomplished? Choose 2 answers

- A.** Download an unmanaged package from the AppExchange that provide customizable mass edit, update, and delete functionality.
- B.** Download a managed package from the AppExchange that provides customizable Enhanced List Views and buttons
- C.** Create a new Visualforce page and Apex Controller for the list view that provides mass edit, update and delete functionality.
- D.** Configure the user interface and enable both inline editing and enhanced lists.

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 65

The account object has a custom percent field, rating, defined with a length of 2 with 0 decimal places. An account record has the value of 50% in its rating field and is processed in the apex code below after being retrieved from the database with SOQL public void processaccount()

```
{ decimal acctscore = acc.rating__c *
```

```
100; } what is the value of acctscore after this code executes?
```

- A.** 500
- B.** 5
- C.** 5000
- D.** 50

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 66

What is the data type returned by the following SOSL search? {FIND 'Acme*' in name fields returning account,opportunity};

- A.** Map<Id,sObject>
- B.** Map<sObject,sObject>
- C.** List<List<Account>,List<Opportunity>
- D.** List<List<sObject>>

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 67

Get Cloudy Consulting (GCC) has a multitude of servers that host its customers' websites. GCC wants to provide a servers status page that is always on display in its call center. It should update in real time with any changes made to any servers. To accommodate this on the server side, a developer created a server Update platform event.


The developer is working on a Lightning web component to display the information.

- A. import (subscribe, unsubscribe, onError) from 'lightning/MessageChannel'
- B. import (subscribe, unsubscribe, onError) from 'lightning/empApi '
- C. import (subscribe, unsubscribe, onError) from 'lightning/pubsub'
- D. import (subscribe, unsubscribe, onError) from 'lightning/ServerUpdate'

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 68

Refer to the following Apex code:

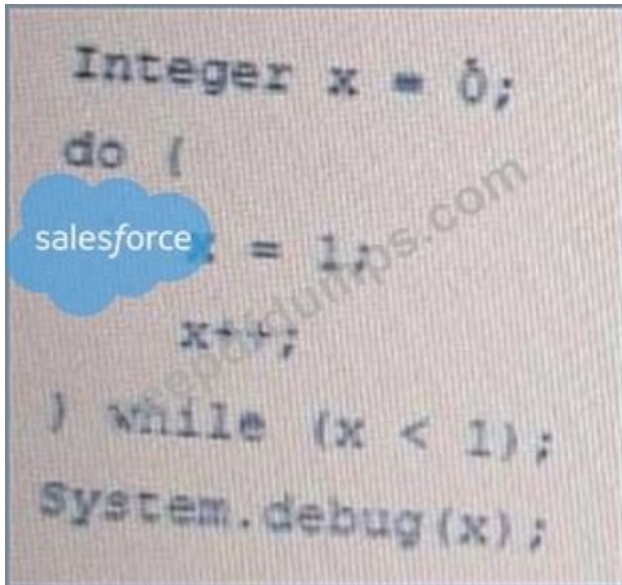

```
Integer x = 0;  
do {  
    salesforce = 1;  
    x++;  
} while (x < 1);  
System.debug(x);
```

What is the value of x when it is written to the debug log?

- A. 0
- B. 1
- C. 2
- D. 3

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 69

The following automations already exist on the Account object;

- * A workflow rule that updates a field when a certain criteria is met
- * A custom validation on a field
- * A Flow that updates related contact records

A developer created a trigger on the Account object.

What should the developer consider while testing the trigger code?

- A. A workflow rule field update will cause the custom validation to run again.
- B. The trigger may fire multiple times during a transaction.
- C. Workflow rules will fire only after the trigger has committed all DML operations to the database.
- D. The flow may be launched multiple times.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 70

Universal Containers needs to create a custom user interface component that allows users to enter information about their accounts.

The component should be able to validate the user input before saving the information to the database.

What is the best technology to create this component?

- A. Visualforce
- B. Lightning Web Components
- C. VUE JavaScript framework
- D. Flow

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 71

A developer wrote an Apex method to update a list of Contacts and wants to make it available for use by Lightning web components.

Which annotation should the developer add to the Apex method to achieve this?

- A. `@AuraEnabled(cacheable=true)`
- B. `@AuraEnabled`
- C. `@RemoteAction`
- D. `@RemoteAction(cacheable=true)`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 72

Assuming that naze is 8 String obtained by an <apex:inputText> tag on 8 Visualforce page, which two SOQL queries performed are safe from SOQL injection?

'Choose 2 answers

- A.

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name + '\''';  
List<Account> results = Database.query(query);
```
- B.

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name.noQuotes() + '\''';  
List<Account> results = Database.query(query);
```
- C.

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + String.escapeSingleQuotes(name) + '\''';  
List<Account> results = Database.query(query);
```
- D.

```
String query = '\'' + name + '\''';  
List<Account> results = [SELECT Id FROM Account WHERE Name LIKE :query];
```

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 73

A Licensed_Professional__c custom object exist in the system with two Master-Detail fields for the following objects: Certification__c and Contact. Users with the "Certification Representative"

role can access the Certification records they own and view the related Licensed Professionals records, however users with the "Salesforce representative" role report they cannot view any Licensed professional records even though they own the associated Contact record. What are two likely causes of users in the "Sales Representative" role not being able to access the Licensed Professional records? Choose 2 answers

- A. The organization's sharing rules for Licensed_Professional__c have not finished their recalculation process. (Missed)
- B. The organization has a private sharing model for Certification__c, and Contact is the primary relationship in the Licensed_Professional__c object
- C. The organization has a private sharing model for Certification__c, and Certification__c is the primary relationship in the Licensed_Professional__c object. (Missed)
- D. The organization recently modified the Sales representative role to restrict Read/Write access to Licensed_Professional__c

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 74

Which Apex class contains methods to return the amount of resources that have been used for a particular governor, such as the number of DML statements?

- A. OrgLimits
- B. Limits
- C. Exception
- D. Messaging

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 75

Which three resources in an Aura component can contain JavaScript functions? Choose 3 answers

- A. Design
- B. Helper
- C. Controller
- D. Renderer
- E. Style

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 76

Given the code below:

```
List<Account> aList = [SELECT Id FROM Account];
for (Account a : aList){
    List<Contact> cList = [SELECT Id FROM Contact WHERE AccountId = :a.Id];
}
```

What should a developer do to correct the code so that there is no chance of hitting a governor limit?

- A. Add a WHERE clause to the first SELECT SOQL statement.
- B. combine the two SELECT statements into a single SOQL statement.
- C. Rework the code and eliminate the for loop.
- D. Add a LIMIT clause to the first SELECT SOQL statement.

Answer: D ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 77

Universal Containers (UC) uses a custom object called Vendor. The Vendor custom object has a Master-Detail relationship with the standard Account object. Based on some internal discussion, the UC administrator tried to change the Master-Detail relationship to a Lookup relationship but was not able to do so. What is a possible reason that this change was not permitted?

- A. The Account object is included on a workflow on the Vendor object.
- B. The Vendor object must use a Master-Detail field for reporting.
- C. The Account records contain Vendor roll-up summary fields.
- D. The Vendor records have existing values in the Account object.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 78

A developer creates a new Apex trigger with a helper class, and writes a test class that only exercises 95% coverage of new Apex helper class. Change Set deployment to production fails with the test coverage warning:

"Test coverage of selected Apex Trigger is 0%, at least 1% test coverage is required" What should the developer do to successfully deploy the new Apex trigger and helper class?

- A. Increase the test class coverage on the helper class
- B. Run the tests using the 'Run All Tests' method.
- C. Create a test class and methods to cover the Apex trigger

D. Remove the failing test methods from the test class.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 79


Which annotation exposes an Apex class as a RESTful web service?

- A. RemoteAction
- B. AuraEnabled
- C. HttpInvocable
- D. RestResource

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 80

A developer is building custom search functionality that uses SOSL to search account and contact records that match search terms provided by the end user. The feature is exposed through a Lightning web component, and the end user is able to provide a list of terms to search. Consider the following code snippet:

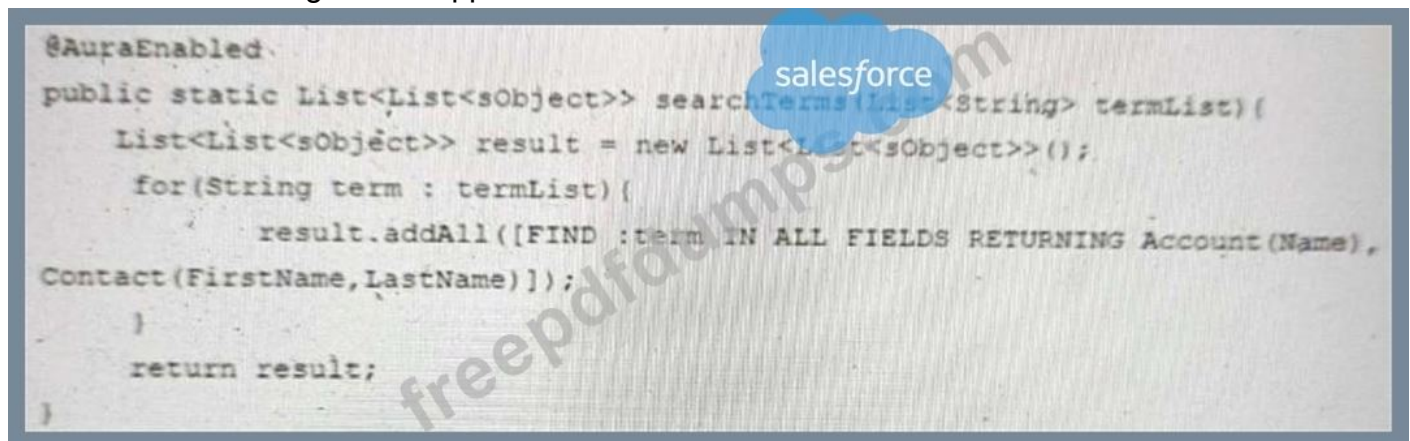

```
@AuraEnabled
public static List<List<sObject>> searchTerms(List<String> termList){
    List<List<sObject>> result = new List<List<sObject>>();
    for(String term : termList){
        result.addAll([FIND :term IN ALL FIELDS RETURNING Account(Name),
        Contact(FirstName, LastName)]);
    }
    return result;
}
```

What is the maximum number of search terms the end user can provide to successfully execute the search without exceeding a governor limit?

- A. 2,000
- B. 20
- C. 200
- D. 150

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 81

Which annotation exposes an Apex class as a RESTful web service?

- A. @Remote Action
- B. @RestResource
- C. @AuraEnabled
- D. @HttpInvocable

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 82

In the Lightning UI, where should a developer look to find information about a Paused Flow Interview?

- A. On the Paused Row Interviews related List for a given record
- B. On the Paused Row Interviews component on the Home page
- C. In the Paused Interviews section of the Apex Flex Queue
- D. In the system debug log by Altering on Paused Row Interview

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 83

A developer migrated functionality from JavaScript Remoting to a Lightning web component and wants to use the existing `getOpportunities()` method to provide data.

What to do now?

- A. The method must be decorated with `@AuraEnabled`.
- B. The method must be decorated with `(cacheable=true)`.
- C. The method must return a String of a serialized JSON Array.
- D. The method must return a JSON Object.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 84

What is true for a partial sandbox that is not true for a full sandbox? Choose 2 answers:

- A. More frequent refreshes.
- B. Use of change sets.
- C. Limited to 5 GB of data.
- D. Only Includes necessary metadata.

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 85

A developer writes a trigger on the Account object on the before update event that increments a count field. A workflow rule also increments the count field every time that an Account is created or updated. The field update in the workflow rule is configured to not re-evaluate workflow rules. What is the value of the count field if an Account is inserted with an initial value of zero, assuming no other automation logic is implemented on the Account?

- A. 2
- B. 3
- C. 4
- D. 1

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 86

A developer created a weather app that contains multiple Lightning web components.

One of the components, called Toggle, has a toggle for Fahrenheit or Celsius units. Another component, called Temperature, displays the current temperature in the unit selected in the Toggle component. When a user toggles from Fahrenheit to Celsius or vice versa in the Toggle component, the information must be sent to the Temperature component so the temperature can be converted and displayed.

What is the recommended way to accomplish this?

- A. Create a custom event to handle the communication between the components.
- B. The Toggle component should call a method in the Temperature component.
- C. Use Lightning Message Service to communicate between the components.
- D. Use Lightning Message Service to communicate between the components.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 87

What is a correct pattern to follow when programming in Apex on a Multi-tenant platform?

- A. Apex code is created in a separate environment from schema to reduce deployment errors.
- B. Queries select the fewest fields and records possible to avoid exceeding governor limits.
- C. Apex classes use the "with sharing" keyword to prevent access from other server tenants.
- D. DML is performed on one record at a time to avoid possible data concurrency issues.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 88

Universal Containers wants to assess the advantages of declarative development versus programmatic customization for specific use cases in its Salesforce implementation.

What are two characteristics of declarative development over programmatic customization?

Choose 2 answers

- A. Declarative development can be done using the setup menu.
- B. Declarative development has higher design limits and query limits.
- C. Declarative code logic does not require maintenance or review.
- D. Declarative development does not require Apex test classes.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 89

What are the methods used to show input in classic and lightning?

Answer:

Use Visualforce page in classic and lightning component in lightning

NEW QUESTION: 90

When using SalesforceDX, what does a developer need to enable to create and manage scratch orgs?

- A. Production
- B. Dev Hub

C. Environment Hub

D. Sandbox

Answer: ([SHOW ANSWER](#))

https://developer.salesforce.com/docs/atlas.en-us.sfdx_dev.meta/sfdx_dev/sfdx_dev_scratch_orgs.htm

NEW QUESTION: 91

A developer has a VF page and custom controller to save Account records. The developer wants to display any validation rule violation to the user. How can the developer make sure that validation rule violations are displayed?

A. Add custom controller attributes to display the message.

B. Include <apex:messages> on the Visualforce page.

C. Use a try/catch with a custom exception class.

D. Perform the DML using the Database.upsert() method

Answer: B ([LEAVE A REPLY](#))

Explanation

https://developer.salesforce.com/docs/atlas.en-us.pages.meta/pages/pages_compref_message.htm

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 92

A developer writes the following code:

```
List<Account> acc = [SELECT Id FROM Account LIMIT 10];
Delete acc;
Database.emptyRecycleBin(acc);

System.Debug(Limits.getDMLStatements() + ', ' + Limits.getLimitDMLStatements());
```

What is the result of the debug statement?

A. 1, 150

B. 1, 100

C. 2, 150

D. 2, 200

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 93

A developer has a single custom controller class that works with a Visualforce Wizard to support creating and editing multiple subjects. The wizard accepts data from user inputs across multiple Visualforce pages and from a parameter on the initial URL.

Which three statements are useful inside the unit test to effectively test the custom controller?

Choose 3 answers

- A. `ApexPages.CurrentPage().getParameters().put('input', 'TestValue');`
- B. `Test.setCurrentPage(pageRef);`
- C. `public ExtendedController(ApexPages.StandardController ctrl) { }`
- D. `String nextPage = controller.save().getUrl();`
- E. `insert pageRef.`

Answer: A,B,D ([LEAVE A REPLY](#))

NEW QUESTION: 94

Universal Container wants Opportunities to no longer be editable when it reaches the Closed/Won stage.

Which two strategies can a developer use to accomplish this?

Choose 2 answer

- A. Use an after-save flow.
- B. Use the Process Automation settings.
- C. Use a trigger
- D. Use a validation

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 95

A developer created a new trigger that inserts a Task when a new Lead is created. After deploying to production, an outside integration that reads task records is periodically reporting errors.

Which change should the developer make to ensure the integration is not affected with minimal impact to business logic?

- A. Deactivate the trigger before the integration runs.
- B. Use a try-catch block after the insert statement.
- C. Use the Database method with `allOrNone` set to false
- D. Remove the Apex class from the integration user's profile.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 96

A business implemented a magnification plan to encourage its customers to watch some educational videos.

Customers can watch videos over several days, and their progress is recorded. Award points are granted to customers for all completed videos. When the video is marked as completed in Salesforce, an external web service must be called so that points can be awarded to the user.

A developer implemented these requirements in the after update trigger by making a call to an external web service. However, a System.CalloutException is occurring.

What should the developer do to fix this error?

- A. Replace the after update trigger with a before insert trigger.
- B. Move the callout to an asynchronous method with structure (callout=true) annotation.
- C. Surround the external call with a try-catch block to handle the exception.
- D. Write a REST service to integrate with the external web service.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 97

Given the code below:

```
List<Account> aList = [SELECT Id FROM Account];  
for (Account a : aList){  
    List<Contact> cList = [SELECT Id FROM Contact WHERE AccountId = :a.Id];  
}
```

What should a developer do to correct the code so that there is no chance of hitting a governor limit?

- A. Add a WHERE clause to the first SELECT SOQL statement.
- B. combine the two SELECT statements into a single SOQL statement.
- C. Rework the code and eliminate the for loop.
- D. Add a LIMIT clause to the first SELECT SOQL statement.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 98

A developer has the following code:try {List nameList;Account a;String s = a.Name;nameList.add(s);} catch (ListException le) {System.debug(' List Exception ');} catch (NullPointerException npe) {System.debug(' NullPointerException ');} catch (Exception e) {System.debug(' Generic Exception ');} What message will be logged?

- A. Generic Exception
- B. No message is logged
- C. NullPointerException
- D. List Exception

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 99

A platform developer needs to write an apex method that will only perform an action if a record is assigned to a specific record type. Which two options allow the developer to dynamically determine the ID of the required record type by its name? Choose 2 answers

- A. Execute a SOQL query on the recordtype object
- B. Make an outbound web services call to the SOAP API

C. Hardcore the ID as a constant in an apex class

D. Use the `getrecordtypeinfosbydevelopername()` method in the `describesobjectresult` class

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 100

A developer has a Apex controller for a Visualforce page that takes an ID as a URL parameter. How should the developer prevent a cross site scripting vulnerability?

A. `String.escapeSingleQuotes(ApexPages.currentPage().getParameters().get('url_param'))`

B. `String.ValueOf(ApexPages.currentPage().getParameters().get('url_param'))`

C. `ApexPages.currentPage().getParameters().get('url_param').escapeHtml4()`

D. `ApexPages.currentPage().getParameters().get('url_param')`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 101

Universal Containers hires a developer to build a custom search page to help user- find the Accounts they want. Users will be able to search on Name, Description, and a custom comments field.

Which consideration should the developer be aware of when deciding between SOQL and SOSL?

Choose 2 answers

A. SOQL is able to return more records.

B. SOSL is able to return more records.

C. SOSL is faster for text searches.

D. SOQL is faster for text searches.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 102

A custom picklist field, `Food_Preference__c`, exist on a custom object. The picklist contains the following options: 'Vegan','Kosher','No Preference'. The developer must ensure a value is populated every time a record is created or updated. What is the most efficient way to ensure a value is selected every time a record is saved?

A. Set "Use the first value in the list as the default value" as True.

B. Set a validation rule to enforce a value is selected.

C. Mark the field as Required on the field definition.

D. Mark the field as Required on the object's page layout.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 103

Given the following Anonymous Block:

Given the following Anonymous Block:

```

List<Case> casesToUpdate = new List<Case>();
for(Case thisCase : [Select Id, Status FROM Case LIMIT 50000]){
    thisCase.Status = 'Working';
    casesToUpdate.add(thisCase);
}
try{
    Database.update(casesToUpdate, false);
} catch(Exception e){
    System.debug(e.getMessage());
}

```

Which one do you like?

What should a developer consider for an environment that has over 10,000 Case records?

- A. The transaction will fail due to exceeding the governor limit.
- B. The try/catch block will handle any DML exceptions thrown.
- C. The transaction will succeed and changes will be committed.
- D. The try/catch block will handle exceptions thrown by governor limits.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 104

A developer created a trigger on the Account object and wants to test if the trigger is properly bulkified. The developer team decided that the trigger should be tested with 200 account records with unique names.

What two things should be done to create the test data within the unit test with the least amount of code? Choose 2 answers A developer created a trigger on the Account object and wants to test if the trigger is properly bulkified. The developer team decided that the trigger should be tested with 200 account records with unique names.

What two things should be done to create the test data within the unit test with the least amount of code?

Choose 2 answers

- A. Use the @isTest(isParallel=true) annotation in the test class.
- B. Use Test.loadData to populate data in your test methods.
- C. Use the @isTest(seeAllData=true) annotation in the test class.
- D. Create a static resource containing test data.

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 105

Which Apex collection is used to ensure that all values are unique?

- A. An sObject
- B. A List
- C. An Enum
- D. A Set

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 106

What is the result of the following Classes page?

- A. view the overall Code Coverage panel of the tab in the Developer Console.
- B. Select and run the class on the Apex Test Execution page
- C. View the Code Coverage column in the view on the Apex Classes page.
- D. View the Class test Coverage tab on the Apex Class record.

Answer: D ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 107

Refer to the following code that runs in an Execute Anonymous block:

```
for(listlead> theseLeads : [SELECT LastName, Company, Email FROM lead LIMIT 20000]){  
    for(Lead thislead : theseLeads){  
        if(thislead.Email == null)  
            thislead.Email = assignGenericEmail(thislead.LastName, thislead.Company);  
    }  
    Database.update(theseLeads, false);  
}
```

- A. The total number of DML statements will be exceeded.
- B. The total number of records processed as a result of DML statements will be exceeded
- C. The transaction will succeed and the first ten thousand records will be committed to the database.
- D. The total number of records processed as a result of DML statements will be exceeded.
- E. In an environment where the full result set is returned, what is a possible outcome of this code?

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 108

Which type of code represents the Controller in MVC architecture on the Force.com platform?
(Choose 2)

- A. A static resource that contains CSS and images.
- B. JavaScript that is used to make a menu item display itself.
- C. StandardController system methods that are referenced by Visualforce.
- D. Custom Apex and JavaScript code that is used to manipulate data.

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 109

Which two automation tools include a graphical designer? Choose 2 answers

- A. Process builder

- B. Flow builder
- C. Approvals
- D. Workflows

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 110

A developer needs to include a Visualforce page in the detail section of a page layout for the Account object, but does not see the page as an available option in the Page Layout Editor. Which attribute must the developer include in the <apex:page> tag to ensure the Visualforce page can be embedded in a page layout?

- A. StandardController="Account"
- B. Extensions="AccountController"
- C. Controller="Account"
- D. Action="AccountId"

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 111

An Approval Process is defined in the Expense_Item__c. A business rule dictates that whenever a user changes the Status to 'Submitted' on an Expense_Report__c record, all the Expense_Item__c records related to the expense report must enter the approval process individually. Which approach should be used to ensure the business requirement is met?

- A. Create a Process Builder on Expense_Report__c to mark the related Expense_Item__c as submittable and trigger on Expense_item__c to submit the records for approval.
- B. Create a Process Builder on Expense_Report__c with a 'Submit for Approval' action type to submit all related Expense_Item__c records when the criteria is met.
- C. Create two Process Builder, one on Expense_Report__c to mark the related Expense_Item__c as submittable and the second on Expense_Item__c to submit the records for approval.
- D. Create a Process Builder on Expense_Report__c with an 'Apex' action type to submit all related Expense_Item__c records when the criteria is met.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 112

A developer has a requirement to create an Order When an Opportunity reaches a "Closed-Won" status.

Which tool should be used to implement this requirement?

- A. Lightning
- B. Lightning Component
- C. Apex trigger
- D. Process Builder

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 113

What can be used to override the Account's standard Edit button for Lightning Experience?

- A. Lightning action
- B. Lightning page
- C. Lightning flow
- D. Lightning component

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 114

When the value of a field of an account record is updated, which method will update the value of a custom field opportunity? Choose 2 answers.

- A. A cross-object formula field on the Account object
- B. A process builder on the Account object
- C. An Apex trigger on the Account object.
- D. A workflow rule on the Account object

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 115

Which two are phases in the Salesforce Application Event propagation framework? Choose 2 answers

- A. Default
- B. Bubble
- C. Capture

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 116

In terms of the MVC paradigm, what are two advantages of implementing the layer of a Salesforce application using Aura Component-based development over Visualforce? Choose 2 answers

- A. Automatic code generation
- B. Rich component ecosystem
- C. Server-side run-time debugging

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 117

The sales management team requires that the lead source field of the Lead record be populated when Lead is converted. What would a developer use to ensure that a user populates the Lead source field?

- A. Formula field
- B. Process builder
- C. Validation rule

D. Workflow rule

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 118

Universal Hiring uses Salesforce to capture job applications. A salesforce administrator created two custom objects; Job__c acting as the master object, Job_Application__c acting as the detail. Within the Job __c object, a custom multi-select picklist, preferred Locations __c, contains a list of approved states for the position. Each Job_Application__c record relates to a Contact within the system through a master-detail relationship.

Recruiters have requested the ability to view whether the Contact's Mailing State value matches a value selected on the Preferred_Locations__c field, within the Job_Application__c record.

Recruiters would like this value to be kept in sync if changes occur to the Contact's Mailing State. What is the recommended tool a developer should use to meet the business requirement?

- A. Formula field
- B. Record-triggered flow
- C. Apex trigger
- D. Roll-up summary field

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 119

A developer creates a new Apex trigger with a helper class, and writes a test class that only exercises 95% coverage of new Apex helper class. Change Set deployment to production fails with the test coverage warning:

"Test coverage of selected Apex Trigger is 0%, at least 1% test coverage is required" What should the developer do to successfully deploy the new Apex trigger and helper class?

- A. Remove the failing test methods from the test class.
- B. Run the tests using the 'Run All Tests' method.
- C. Create a test class and methods to cover the Apex trigger
- D. Increase the test class coverage on the helper class

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 120

Universal Containers wants to assess the advantages of declarative development versus programmatic customization for specific use cases in its Salesforce implementation.

What are two characteristics of declarative development over programmatic customization?

Choose 2 answers

- A. Declarative development does not require Apex test classes.
- B. Declarative development has higher design limits and query limits.
- C. Declarative code logic does not require maintenance or review.
- D. Declarative development can be done using the Setup UI.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 121

A Lightning component has a wired property, `searchResults`, that stores a list of Opportunities. Which definition of the Apex method, to which the `searchResults` property is wired, should be used?

A. `@AuraEnabled(cacheable=false)`

`public List<Opportunity> search(String term) { /*implementation*/ }`

B. `@AuraEnabled(cacheable=true)`

`public static List<Opportunity> search(String term) { /* implementation*/ }`

C. `@AuraEnabled(cacheable=false)`

`public static List<Opportunity> search(String term) { /*implementation*/ }`

D. `@AuraEnabled(cacheable=true)`

`public List<Opportunity> search(String term) { /*implementation*/ }`

Answer: ([SHOW ANSWER](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 122

A developer has the controller class below.

```
public with sharing class myFooController {  
    public integer prop { get; private set; }  
}
```

Which code block will run successfully in an execute anonymous window?

A. `myFooController m = new myFooController();System.assert(m.prop !=null);`

B. `myFooController m = new myFooController();System.assert(m.prop ==1);`

C. `myFooController m = new myFooController();System.assert(m.prop ==null);`

D. `myFooController m = new myFooController();System.assert(m.prop ==0);`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 123

A Next Best Action strategy uses an Enhance Element that invokes an Apex method to determine a discount level for a Contact, based on a number of factors. What is the correct definition of the Apex method?

A. `@InvocableMethod`

`global static ListRecommendation getLevel(List<ContactWrapper> input)`

```
{ /*implementation*/ }
```

B. @InvocableMethod

```
global static List<List<Recommendation>> getLevel(List<ContactWrapper> input)
```

```
{ /*implementation*/ }
```

C. @InvocableMethod

```
global List<List<Recommendation>> getLevel(List<ContactWrapper> input)
```

```
{ /*implementation*/ }
```

D. @InvocableMethod

```
global Recommendation getLevel (ContactWrapper input)
```

```
{ /*implementation*/ }
```

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 124

What are two ways that a controller and extension can be specified on a Visualforce page?

Choose 2 answers

A. Qo apex:page standardController="Account" extensions="myControllerExtension"

B. apex:page controllers="Account, myControllerExtension"

C. a@pex:page=Account extends="myControllerExtension"

D. apex:page controller="Account" extensions="myControllerExtension""

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 125

What is a capability of formula fields? (Choose 3)

A. Determine which of three different images to display using the IF function.

B. Generate a link using the HYPERLINK function to a specific record in a legacy system.

C. Display the previous values for a field using the PRIORVALUE function.

D. Determine if a datetime field has passed using the NOW function.

E. Return and display a field value from another object using the VLOOKUP function.

Answer: A,B,D ([LEAVE A REPLY](#))

NEW QUESTION: 126

A custom Visualforce controller calls the ApexPages,addMessage () method, but no messages are rendering on the page.

Which component should be added to the Visualforce page to display the message?

A. <apex: pageMessage severity="info"/>

B. <Apex: facet name=" message"/>

C. <Apex: message for=" info"/>

D. <apex: pageMessages />

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 127

What should a developer use to obtain the Id and Name of all the Leads, Accounts, and Contacts that have the company name "Universal Containers"?

- A. FIND Universal Containers' IN CompanyName Fields RETURNING lead{Id, name), accounted, name), contacted, name)
- B. SELECT lead(id, name). accountOd, name), contacted, name) FROM Lead, Account, Contact WHERE Name = "universal Containers'
- C. FIND 'Universal Containers' IN Name Fields RETURNING leadjid, name), accounted, name), contacted, name)
- D. SELECT Lead.id, Lead.Name, Account.Id, AccountName, Contacted, Contact.Name FROM Lead, Account, Contact WHERE CompanyName * Universal Containers'

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 128

A developer has an integer variable called maxAttempts. The developer needs to ensure that once maxAttempts is initialized, it preserves its value for the length of the Apex transaction; while being able to share the variable's state between trigger executions. How should the developer declare maxAttempts to meet these requirements?

- A. Declare maxattempts as a variable on a helper class
- B. Declare maxattempts as a member variable on the trigger definition.
- C. Declare maxattempts as a constant using the static and final keywords
- D. Declare maxattempts as a private static variable on a helper class

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 129

A developer creates a Workflow Rule declaratively that updates a field on an object. An Apex update trigger exists for that object. What happens when a user updates a record?

- A. Both the Apex Trigger and Workflow Rule are fired only once.
- B. The Apex Trigger is fired more than once.
- C. No changes are made to the data.
- D. The Workflow Rule is fired more than once.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 130

A developer has a VF page and custom controller to save Account records. The developer wants to display any validation rule violation to the user. How can the developer make sure that validation rule violations are displayed?

- A. Add custom controller attributes to display the message.
- B. Include <apex:messages> on the Visualforce page.
- C. Use a try/catch with a custom exception class.
- D. Perform the DML using the Database.upsert() method

Answer: B ([LEAVE A REPLY](#))

https://developer.salesforce.com/docs/atlas.en-us.pages.meta/pages/pages_compref_message.htm

NEW QUESTION: 131

A developer created a Lightning component to display a short text summary for an object and wants to use it with multiple Apex classes.

How should the developer design the Apex classes?

- A.** Have each class define method `getTextSummary()` that returns the summary.
- B.** Extend each class from the same base class that has a method `getTextSummary()` that returns the summary.
- C.** Have each class implement an interface that defines method `getTextSummary()` that returns the summary.
- D.** Have each class define method `getObject()` that returns the `sObject` that is controlled by the Apex class.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 132

Universal Containers recently transitioned from Classic to Lightning Experience. One of its business processes requires certain value from the opportunity object to be sent via HTTP REST callout to its external order management system based on a user-initiated action on the opportunity page. Example values are as follow Name Amount Account Which two methods should the developer implement to fulfill the business requirement? (Choose 2 answers)

- A.** Create a Visualforce page that performs the HTTP REST callout, and use a Visualforce quick action to expose the component on the Opportunity detail page.
- B.** Create an after update trigger on the Opportunity object that calls a helper method using `@Future(Callout=true)` to perform the HTTP REST callout.
- C.** Create a Lightning component that performs the HTTP REST callout, and use a Lightning Action to expose the component on the Opportunity detail page.
- D.** Create a Process Builder on the Opportunity object that executes an Apex immediate action to perform the HTTP REST callout whenever the Opportunity is updated.

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 133

A developer of Universal Containers is tasked with implementing a new Salesforce application that must be able to by their company's Salesforce administrator.

Which three should be considered for building out the business logic layer of the application?

Choose 3 answers

- A.** Scheduled Jobs
- B.** Workflows
- C.** Invocable Actions
- D.** Process Builder

E. validation Rules

Answer: B,D,E ([LEAVE A REPLY](#))

NEW QUESTION: 134

Universal container wants a list button to display a visualforce page that allows users to edit multiple records which visualforce feature supports this requirement.

A. Recordsetvar page attribute

Answer: A ([LEAVE A REPLY](#))


NEW QUESTION: 135

What will be the output in the debug log in the event of a QueryException during a call to the @query method in the following Example?

```
class myClass {
    class CustomException extends QueryException {}
    public static Account aQuery() {
        Account theAccount;
        try {
            system.debug('Querying Accounts.');
```



```
            theAccount = [SELECT Id FROM Account WHERE CreatedDate > TODAY];
        }
        catch (CustomException eX) {
            system.debug('Custom Exception.');
```

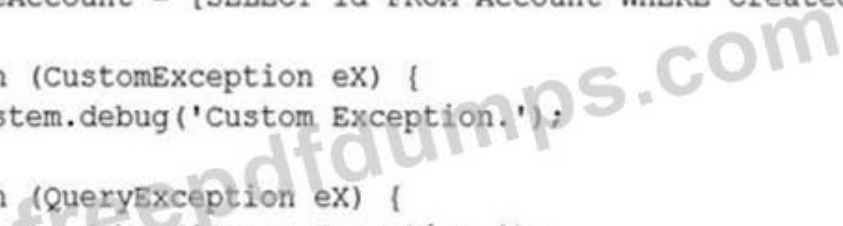

```
        }
        catch (QueryException eX) {
            system.debug('Query Exception.');
```

```
        }
        finally {
            system.debug('Done.');
```

```
        }
        return theAccount;
    }
}
```

A. Querying Accounts. Custom Exception.

B. Querying Accounts. Custom Exception Done.

C. Querying Accounts. Query Exception. Done

D. Querying Accounts. Query Exception.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 136

A team of many developers work in their own individual orgs that have the same configuration at the production org. Which type of org is best suited for this scenario?

A. Developer Edition

B. Developer Sandbox

C. Partner Developer Edition

D. Full Sandbox

Answer: B ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 137

A developer in a Salesforce org with 100 Accounts executes the following code using the Developer console: Account myAccount = new Account(Name = 'MyAccount'); Insert myAccount; For (Integer x = 0; x < 150; x++)

```
{Account newAccount = new Account (Name='MyAccount' + x); try {Insert newAccount;} catch (Exception ex) {System.debug (ex) ;}} insert new Account (Name='myAccount');
```

How many accounts are in the org after this code is run?

A. 100

B. 252

C. 102

D. 101

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 138

A company wants to implement a new call center process for handling customer service calls. It requires service reps to ask for the caller's account number before proceeding with the rest of their call script.

Following best practices, what is the optimal approach to satisfy this requirement?

A. Flow Builder

B. Approvals

C. Einstein Next Best Action

D. Apex trigger

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 139

A developer must provide a custom user interface when users edit a Contact. Users must be able to use the interface in Salesforce Classic and Lightning Experience.

What should the developer do to provide the custom user interface?

- A. Override the Contact's Edit button with a Lightning component in Salesforce Classic and a Lightning component in Lightning Experience.
- B. Override the Contact's Edit button with a Lightning page in Salesforce Classic and a Visualforce page in Lightning Experience.
- C. Override the Contact's Edit button with a Visualforce page in Salesforce Classic and a Lightning component in Lightning Experience.
- D. Override the Contact's Edit button with a Visualforce page in Salesforce Classic and a Lightning page in Lightning Experience.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 140

A developer needs an Apex method that can process Account or Contact records. Which method signature should the developer use?

- A. Public void doWork(sObject theRecord)
- B. Public void doWork(Account Contact)
- C. Public void doWork(Record theRecord)
- D. Public void doWork(Account || Contact)

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 141

Which three declarative fields are correctly mapped to variable types in Apex? (Choose three.)

- A. Number maps to Decimal.
- B. TextArea maps to List of type String.
- C. Checkbox maps to Boolean.
- D. Date/Time maps to Datetime.
- E. Number maps to Integer.

Answer: A,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 142

A developer needs to know if all tests currently pass in a Salesforce environment. Which feature can the developer use? (Choose 2)

- A. Developer Console
- B. Workbench Metadata Retrieval
- C. Salesforce UI Apex Test Execution
- D. ANT Migration Tool

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 143

What should a developer do to check the code coverage of a class after running all tests?

- A. Select and run the class on the Apex Test Execution page
- B. View the Code Coverage column in the view on the Apex Classes page.

- C. View the Class test Coverage tab on the Apex Class record.
- D. view the overall Code Coverage panel of the tab in the Developer Console.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 144

What can be used to override the Account's standard Edit button for Lightning Experience?

- A. Lightning action
- B. Lightning component
- C. Lightning page
- D. Lightning flow

Answer: ([SHOW ANSWER](#))

Explanation

A Lightning Component can be used to override the Account's standard Edit button for Lightning Experience.

This allows the developer to create a custom page with custom fields and custom functionality that can be used instead of the standard Edit page. It also allows for the creation of custom navigation and buttons to make the user experience more intuitive and efficient.

Reference: <https://trailhead.salesforce.com/en/content/learn/projects/quick-start-lightning-components>

NEW QUESTION: 145

The Job_Application__c custom object has a field that is a Master-Detail relationship to the Contact object, where the Contact object is the Master. As part of a feature implementation, a developer needs to retrieve a list containing all Contact records where the related Account Industry is 'Technology' while also retrieving the contact's Job_Application__c records. Based on the object's relationships, what is the most efficient statement to retrieve the list of contacts?

- A. [SELECT Id, (SELECT Id FROM Job_Applications_r) FROM Contact WHERE Account.Industry = 'Technology'];
- B. [SELECT Id, (SELECT Id FROM Job_Applications_r) FROM Contact WHERE Accounts.Industry = 'Technology'];
- C. [SELECT Id, (SELECT Id FROM Job_Application_c) FROM Contact WHERE Account.Industry = 'Technology'];
- D. [SELECT Id, (SELECT Id FROM Job_Applications_c) FROM Contact WHERE Accounts.Industry = 'Technology'];

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 146

The sales management team at Universal Containers requires that the Lead Source field of the Lead record be populated when a Lead is converted.

What should be used to ensure that a user populates the Lead Source field prior to converting a Lead?

- A. workflow Rule
- B. Formula Field
- C. Process Builder
- D. Validation Rule

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 147

A developer writes a trigger on the Account object on the before update event that increments a count field. A workflow rule also increments the count field every time that an Account is created or update. The field update in the workflow rule is configured to not re-evaluate workflow rules. What is the value of the count field if an Account is inserted with an initial value of zero, assuming no other automation logic is implemented on the Account?

- A. 1
- B. 2
- C. 4
- D. 3

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 148

Which option would a developer use to display the Accounts created in the current week and the number of related Contacts using a debug statement in Apex?

- A. `For(Account acc:[SELECT Id, Name, Account.Contacts FROM Account WHERE CreatedDate = CURRENT_WEEK]) { List cons = acc.Account.Contacts; System.debug(acc.Name + ' has ' + cons.size() + 'Contacts'); }`
- B. `For(Account acc: [SELECT Id, Name, (SELECT Id, Name FROM Contacts) FROM Account WHERE CreatedDate = CURRENT_WEEK]){ List cons = acc.Contacts; System.debug(acc.Name + ' has ' + cons.size() + 'Contacts'); }`
- C. `For(Account acc: [SELECT Id, Name, Account.Contacts FROM Account WHERE CreatedDate = THIS_WEEK]){ List cons = acc.Account.Contacts; System.debug(acc.Name + ' has ' + cons.size() + 'Contacts' }`
- D. `For(Account acc: [SELECT Id, Name,(SELECT Id, Name FROM Contacts) FROM Account WHERE CreatedDate = THIS_WEEK]) { List cons = acc.Contacts; System.debug(acc.Name + ' has ' + cons.size() + 'Contacts'; }`

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 149

How are debug levels adjusted In the Developer Console?

- A. Under the Debug menu > Change Log Levels..., click Add/Change in the DebugLevel Action column
- B. Under the Settings menu > Trace Settings..., click Change DebugLevel
- C. Under the Logs tab, click Change in the DebugLevels panel
- D. Under the Edit menu, click Change DebugLevels

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 150

A Licensed_Professional__c custom object exist in the system with two Master-Detail fields for the following objects: Certification__c and Contact. Users with the "Certification Representative" role can access the Certification records they own and view the related Licensed Professionals records, however users with the "Salesforce representative" role report they cannot view any Licensed professional records even though they own the associated Contact record. What are two likely causes of users in the "Sales Representative" role not being able to access the Licensed Professional records? Choose 2 answers

- A. The organization has a private sharing model for Certification__c, and Contact is the primary relationship in the Licensed_Professional__c object
- B. The organization recently modified the Sales representative role to restrict Read/Write access to Licensed_Professional__c
- C. The organization's sharing rules for Licensed_Professional__c have not finished their recalculation process.
- D. The organization has a private sharing model for Certification__c, and Certification__c is the primary relationship in the Licensed_Professional__c object.

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 151

A developer has javascript code that needs to be called by controller functions in multiple components by extending a new abstract component. Which resource in the abstract component bundle allows the developer to achieve this

- A. Helper.js
- B. Superrender.js
- C. Controller.js
- D. Rendered.js

Answer: A ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with

Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 152

Which action may cause triggers to fire?

- A. Updates to Feed Items
- B. Changing a user's default division when the transfer division option is checked
- C. Cascading delete operations
- D. Renaming or replacing a picklist entry

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 153

A developer wrote a unit test to confirm that a custom exception works properly in a custom controller, but the test failed due to an exception being thrown.

Which step should the developer take to resolve the issue and properly test the exception?

- A. Use try/catch within the unit test to catch the exception.
- B. Use the database methods with all or none set to FALSE.
- C. Use Test.isRunningTest() within the custom controller.
- D. Use the finally bloc within the unit test to populate the exception.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 154

When using SalesforceDX, what does a developer need to enable to create and manage scratch orgs?

- A. Environment Hub
- B. Production
- C. Dev Hub
- D. Sandbox

https://developer.salesforce.com/docs/atlas.en-us.sfdx_dev.meta/sfdx_dev/sfdx_dev_scratch_orgs.htm

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 155

A developer is creating a page that allows users to create multiple Opportunities. The developer is asked to verify the current user's default } | Opportunity record type, and set certain default values based on the record type before inserting the record. i, J Calculator How can the developer find the current user's default record type? ns

- A. Query the Profile where the ID equals userInfo.getProfileID() and then use the profile.Opportunity.getDefaultRecordType() | | method.] |
- B. o Use Opportunity. SObjectType.getDescribe().getRecordTypeInfo() to get a list of record types, and iterate through them until [J isDefaultRecordTypeMapping() is true. Pencil & Paper |

C. Use the Schema.userInfo.Opportunity.getDefaultRecordType() method. < Create the opportunity and check the opportunity.recordType before inserting, which will have the record ID of the current Dal

Answer: B ([LEAVE A REPLY](#))

user's default record type.

NEW QUESTION: 156

Universal Containers decides to use exclusively declarative development to build out a new Salesforce application. Which three options should be used to build out the database layer for the application? Choose 3 answers

- A.** Custom Objects and Fields
- B.** Relationships
- C.** Roll-Up Summaries
- D.** Triggers
- E.** Flow

Answer: B,C,E ([LEAVE A REPLY](#))

NEW QUESTION: 157

Universal Containers hires a developer to build a custom search page to help user- find the Accounts they want. Users will be able to search on Name, Description, and a custom comments field.

Which consideration should the developer be aware of when deciding between SOQL Mid SOSI ?
Choose 2 answers

- A.** SOSL is faster for text searches.
- B.** SOSL is able to return more records.
- C.** SOQL is able to return more records.
- D.** SOQL is faster for text searches.

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 158

How can a developer warn users of SOQL governor limit violations in a trigger?

- A.** Use ApexMessage.Message() to display an error message after the number of SOQL queries exceeds the limit.
- B.** Use PageReference.setRedirect() to redirect the user to a custom Visualforce page before the number of SOQL queries exceeds the limit.
- C.** Use Messaging.SendEmail() to continue the transaction and send an alert to the user after the number of SOQL queries exceeds the limit.
- D.** Use Limits.getQueries() and display an error message before the number of SOQL queries exceeds the limit.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 159

Universal Containers has a support process that allows users to request support from its engineering team using a custom object, Engineering_Support__c.

Users should be able to associate multiple engineering_Support__c records to a single Opportunity record.

Additionally, aggregate Information about the Engineering_support__c records should be shown on the Opportunity record.

What should a developer Implement to support these requirements?

- A. Master-detail field from Opportunity to Engineering_Support__c
- B. Lookup field from Opportunity to Engineering_Support__c
- C. Lookup field from Engineering_support__c to Opportunity
- D. Master-detail field from Engineering_Support__c to Opportunity.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 160

Refer to the following code snippet for an environment that has more than 200 Accounts belonging to the Technology' industry:

```
for(Account thisAccount : [Select Id, Industry FROM Account LIMIT 250]){
    if(thisAccount.Industry == 'Technology'){
        thisAccount.Is_Tech__c = true;
    }
    update thisAccount;
}
```



which three statements are accurate about debug logs?

Choose 3 answers

- A. Debug log levels are cumulative, where FINE log level includes all events logged at the DEBUG, INFO, WARN, and ERROR levels.
- B. Only the 20 most recent debug logs for a user are kept.
- C. System debug logs are retained for 24 hours.
- D. The maximum size of a debug log is 5 MB.
- E. Debug logs can be set for specific users, classes, and triggers.

Answer: B,C,E ([LEAVE A REPLY](#))

NEW QUESTION: 161

A Salesforce Administrator used Flow Builder to create a flow named "accountOnboarding". The flow must be used inside an Aura component.

Which tag should a developer use to display the flow in the component?

- A. Aura:flow
- B. Lightning:flow
- C. Aura:flow

D. Lightning-flow

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 162

Which two statements are true about Apex code executed in Anonymous Blocks? Choose 2 answers

- A. The code runs in system mode having access to all objects and fields.
- B. The code runs with the permissions of the user specified in the runAs() statement
- C. All DML operations are automatically rolled back
- D. Successful DML operations are automatically committed
- E. The code runs with the permissions of the logged user.

Answer: D,E ([LEAVE A REPLY](#))

NEW QUESTION: 163

Universal Containers hires a developer to build a custom search page to help user- find the Accounts they want. Users will be able to search on Name, Description, and a custom comments field.

Which consideration should the developer be aware of when deciding between SOQL Mid SOSL ?

Choose 2 answers

- A. SOQL is able to return more records.
- B. SOSL is able to return more records.
- C. SOSL is faster for text searches.
- D. SOQL is faster for text searches.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 164

A company has a custom object named Warehouse. Each Warehouse record has a distinct record owner, and is related to a parent Account in Salesforce. Which kind of relationship would a developer use to relate the Account to the Warehouse?

- A. One -to -Many
- B. Master -Detail
- C. Parent -Child
- D. Lookup

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 165

Which three code lines are required to create a Lightning component on a Visualforce page? Choose 3 answers

- A. \$Lightning.use
- B. \$Lightning.useComponent

- C. \$Lightning.createComponent
- D. <apex:slds/>
- E. <apex:includeLightning/>

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 166

A developer has the following class and trigger code:

```
public class InsuranceRates { public static final Decimal smokerCharge = 0.01; } trigger  
ContactTrigger on Contact (before insert) { InsuranceRates rates = new InsuranceRates();  
Decimal baseCost = XXX; } Which code segment should a developer insert at the XXX to set the  
baseCost variable to the value of the class variable smokerCharge?
```

- A. Rates.getSmokerCharge()
- B. Rates.smokerCharge
- C. ContactTrigger.InsuranceRates.smokerCharge
- D. InsuranceRates.smokerCharge

Answer: D ([LEAVE A REPLY](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps, **30%OFF Special Discount: Freepdfdumps**)

NEW QUESTION: 167

A developer can use the debug log to see which three types of information? Choose 3 answers

- A. Actions triggered by time-based workflow
- B. User login events
- C. Database changes
- D. HTTP callout to external systems
- E. Resource usage and limits

Answer: ([SHOW ANSWER](#))

Valid PDI Dumps shared by Actual4test.com for Helping Passing PDI Exam! Actual4test.com now offer the **newest PDI exam dumps**, the Actual4test.com PDI exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com PDI dumps with

Test Engine here: https://www.actual4test.com/PDI_examcollection.html (205 Q&As Dumps,
30%OFF Special Discount: **Freepdfdumps**)