

UiPath.UiPath-ARDv1.v2021-09-17.q67

Exam Code:	UiPath-ARDv1
Exam Name:	UiPath Advanced RPA Developer v1.0 Exam (UiARD)
Certification Provider:	UiPath
Free Question Number:	67
Version:	v2021-09-17
# of views:	2468
# of Questions views:	670
https://www.freepdfdumps.com/UiPath.UiPath-ARDv1.v2021-09-17.q67.html	

NEW QUESTION: 1

Practical exam questions is different for different people, so solution cant be shared but as i have promised that i will help in practical exam, You can mail me at learnautomationr@gmail.com and i will help you to clear practical exam also.

Options are :

A. Understood

B. Answer :Understood

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 2

Which of the following technologies can be used for background automation?

Options are :

A. Data Scraping.

B. The Full Text method of Screen Scraping.


C. Type into activity with SendWindowMessages flag checked.

D. The Click activity with the Simulate Click flag checked.

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 3

Review the following exhibit:

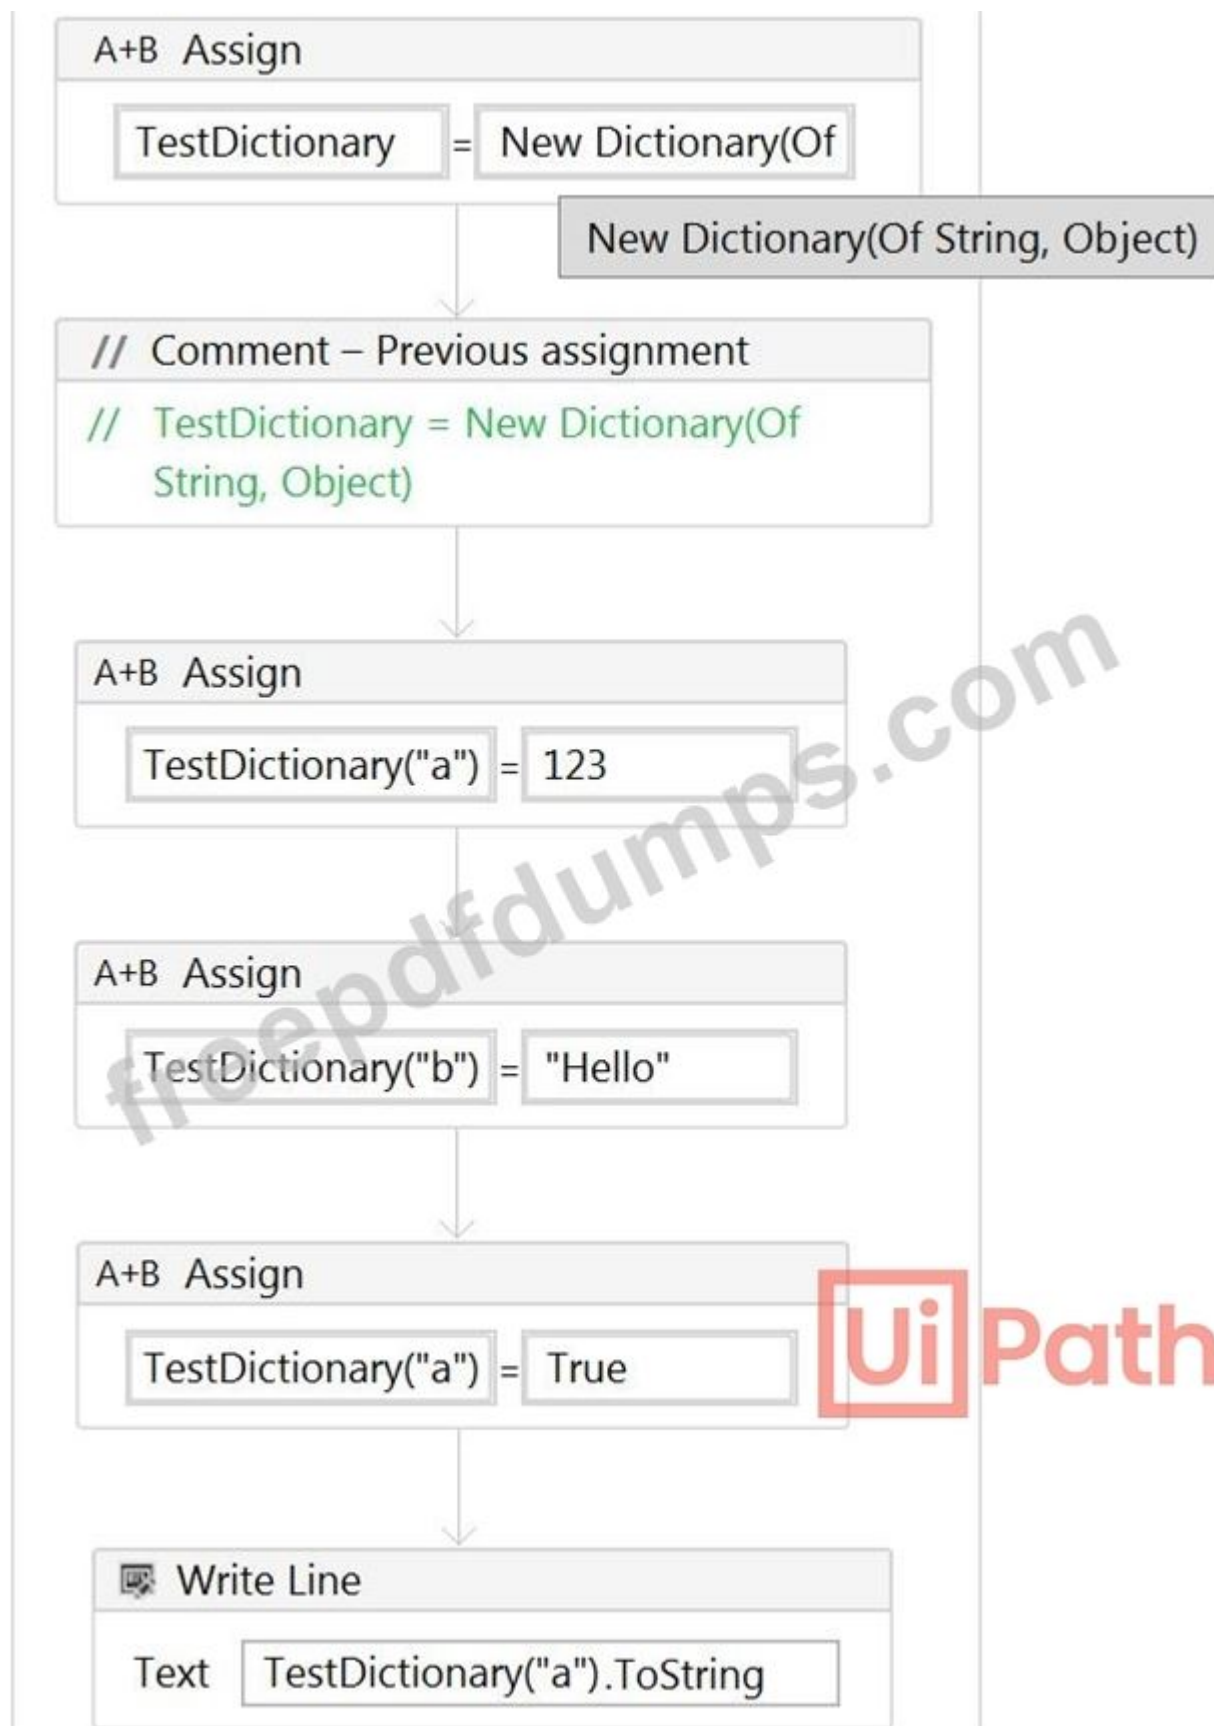

Based on the exhibit, what is the result of the Write Line in the sequence?

- A. Hello
- B. True
- C. 123True
- D. 123

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 4

Which activities allow you to iterate through an array of strings?

Options are :

- A.** For Each Row
- B.** For Each
- C.** While
- D.** Do While

Answer: B,C,D ([LEAVE A REPLY](#))

Topic 1, Case Study

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

The solution has to be scalable, so create two separate projects (sub-processes):

- One for the Dispatcher (add to queue);
- Another one for the Performer (consume queue).

Make sure you use a connection to an UiPath Orchestrator for testing.

Here are the steps performed by the Robot in the Dispatcher:

1. Login to <https://Nvwww.acme-test.com>.
2. On the landing page, Dashboard, click or hover over the Invoices menu item and then click on Search for Invoice. Click on Display All Invoices.
3. Scrape the data from the whole table displayed.
4. For each row in the datatable, Add a queue item containing the Invoice Number, Vendor TaxID and Date.
5. Close ACME System 1.

Here are the steps performed by the Robot in the Performer:

1. Login to <https://Nvwww.acme-test.com>.
2. For each Queue Item:
 - Click or hover over the Invoices menu item and then click on Search for Invoice;
 - Type the Invoice Number retrieved from the queue item into the Invoice Number field;
 - Click on Search;
 - Extract the values for the Vendor TaxID and Date and compare them with the values from the queue item (check for EXACT match for all fields!);
 - If the values are not matching, this should be categorized as a Business Rule Exception, and the queue item should have the status set accordingly;
 - If the values match, the transaction is successful.

Note: Navigation can be achieved in multiple ways by the robot - choose whichever you find best.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a QueueItem. The process should recover and retry 2 times in case of errors in navigation between the Invoice Search and Invoices - Search Results pages. One transaction is the action of navigating to the Invoices Search page, searching for the Invoice Number and scraping the values from the resulting one row table.
2. Create a separate workflow file for the Login to ACME. File input arguments: URL; Username ; Password .

3. Create a separate workflow file for closing ACME.
4. Add the ACME_URL and ACME_Credential to the Excel Config file.
5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACt...1E and navigation to the Work Items.
6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACtv1E.
7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
8. Populate the Process.xaml file with the following actions: Navigation, Searching for Invoice Number, Scraping, Checking if the values match, Handling the Business Rule Exception.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets).

Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip All the used workflow files AND the output Excel file. Then upload the.zip file to the UiPath Certification Platform.


Good luck!

ALL THE BEST!

Send us your feedback on this.

NEW QUESTION: 5

A developer is using GIT for version control. While the developer is attempting to Commit and Push a local file to the repository, the following pop-up message is displayed:

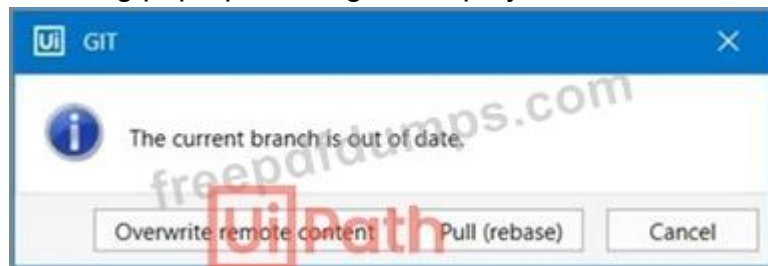

What is the reason for the pop-up message?

- A. Local repository is not synchronized with the remote one.
- B. Local version was not connected to any branch.
- C. Opened project was disconnected from the source control.
- D. Project was not properly checked out in Studio and merge failed into the master.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 6

A developer entered custom values in the Browser property in the UI Automation section of the Activity Project Settings menu.

Which set of activities can be affected by this change?

- A. Open Browser and Close Tab
- B. Attach Browser and Open Browser
- C. Navigate To and Attach Browser
- D. Open Browser and Navigate To

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 7

Where should credentials be stored? Select all the options that apply.

Options are :

- A. In Orchestrator, as assets.
- B. Directly inside the workflows, as variables.
- C. In Windows Credential Store.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

Is it possible to write to a text file without using the Write Text File activity?

Options are :

- A. No
- B. Yes, with the Invoke Power Shell activity
- C. Yes, using the Invoke Method activity

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 9

What type of container will Web Recording generate?

Options are :

- A. Excel Application Scope
- B. Attach Window
- C. Attach Browser
- D. No container

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 10

A developer is creating an automation project which processes personal information of employees.

To protect sensitive information that is logged during the execution of the automation at the Verbose level, how can the developer avoid logging variable and argument values in both Orchestrator and Studio?

- A. Ensure all personal information variables are of the SecureString variable type.
- B. Check the Isolated property when invoking a workflow with sensitive information.
- C. Store all sensitive information in an Excel file that the process can access.
- D. Check the Private property on the activities that contain sensitive information.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 11

What type of argument can you define to pass data and retrieve the modified value from an invoked workflow?

Options are :

- A. Out
- B. In
- C. In/Out

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 12

In the UiPath Robotic Enterprise Framework template, what should be the outcome of the Process Transaction state of the Main workflow when the application loops back to the Get Transaction Item state?

Options are :

- A. Business rule exception
- B. Success
- C. Application exception

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 13

What is the best way to select a row with a certain value from a column in Excel?

Options are :

- A. Use the Find functionality from Excel
- B. Use a Read Range Activity to retrieve the contents of the Excel file, and then use a For Each activity loop to iterate through the data and identify
- C. Use a Read Range Activity to retrieve the contents of the Excel file, and then use a Select Method to identify the desired row

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 14

What is the robot able to do when the Full Text scraping method is used?

Options are :

- A. Get font Information (Size color)
- B. Get the entire visible text
- C. Get editable text
- D. Get hidden information

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 15

A developer is adding a Log Message activity in an Exit section of a single state within a state machine. When will the Log Message activity in the Exit section be executed?

- A. Immediately after the activities in the Entry section are executed.
- B. After the activities in the Entry section and the activities in the trigger are executed.
- C. After the activities in the Entry section are executed, but only if there are exceptions.
- D. After the activities in the Entry section are executed and the transition to the next state is confirmed.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 16

What type of Output variable do all Get Mail activities return? (POP3, IMAP, Outlook, Exchange) Options are :

- A. MailMessage
- B. List
- C. List

Answer: B ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:
https://www.actual4test.com/UiPath-ARDv1_examcollection.html (**340** Q&As Dumps, **30%OFF** Special Discount: **Freepdfdumps**)

NEW QUESTION: 17

What happens if the result of a transaction is not set?

Options are :

- A.** It is automatically set to Successful after 24 hours
- B.** The status is "In Progress" for 24 hours, and then it switches to Abandoned
- C.** It is automatically set to Failed after 24 hours

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 18

What can the UiPath Robotic Enterprise Framework template be used as?


Options are :

- A.** A consumer of a queue in Orchestrator
- B.** A complete library for front office robots
- C.** The starting point for every automation project

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 19

A developer wants to extract data from "Sheet1" of the "Test.xls" file using the following code:

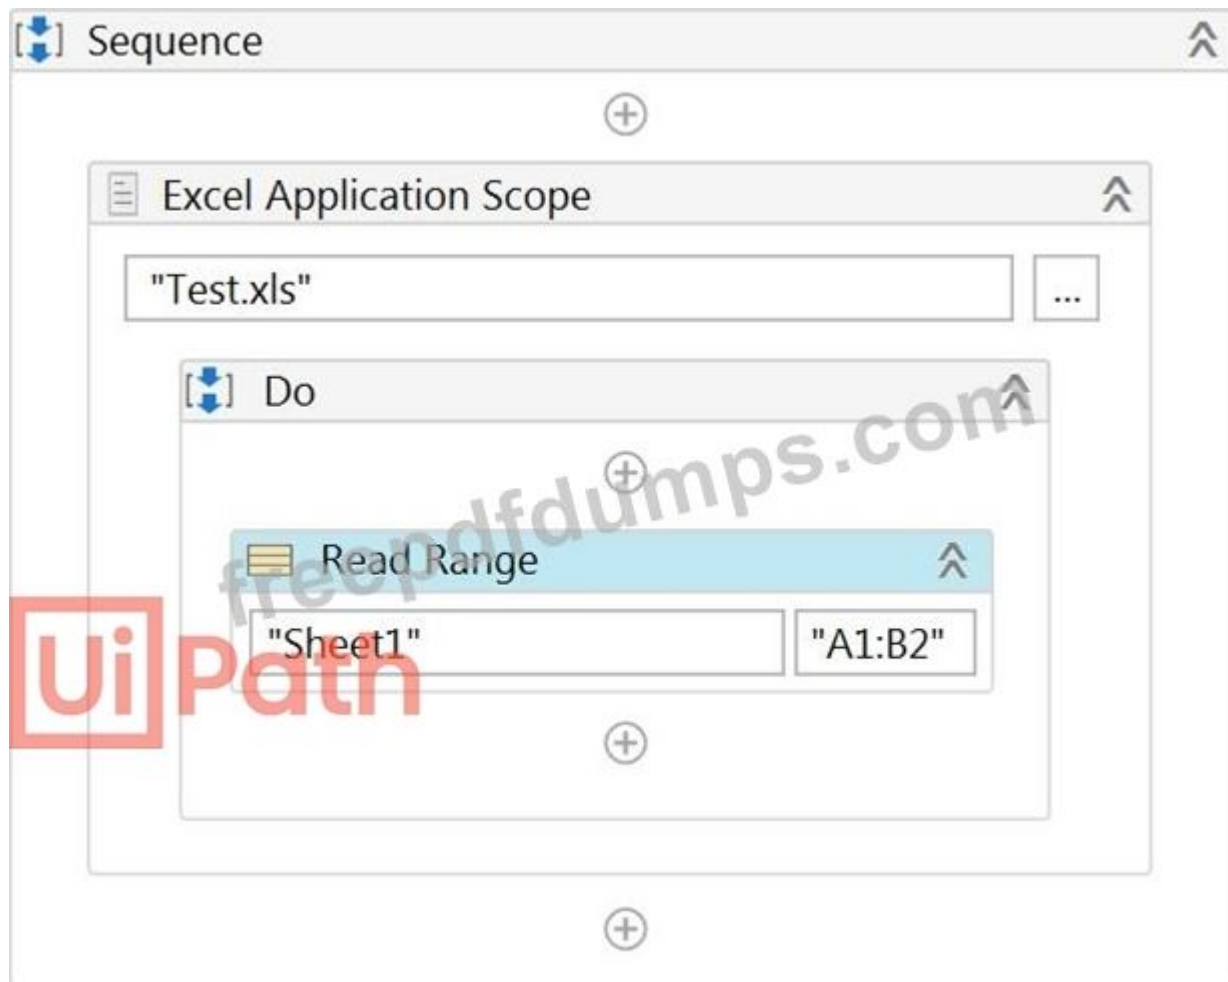

In addition, the developer configured the following properties of the Read Range activity:

Options	
AddHeaders	☒
PreserveFormat	☐
UseFilter	☐

Output	
DataTable	OutputDataTable

Based on the exhibits, what is the result of the execution?

- A. OutputDataTable object will have 2 columns and 1 row containing values of cells "A1" and "B1"
- B. OutputDataTable object will have 2 columns and 1 row containing values of cells "A2" and "B2"
- C. OutputDataTable object will have 2 columns and 10000 rows; the first row will contain values of cells "A1" and "B1"
- D. OutputDataTable object will have 2 columns and 2 rows containing values of cells "A2" and "B2"

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 20

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.

2. On the landing page, Dashboard, click or hover over the Vendors menu item and then click on Search for Vendor. Click on Display All Vendors. Scrape the data from the whole table isplayed. The resulting datatable will be used as the input data for the process. Navigate back to the dashboard.

Note: Navigation can be achieved in multiple ways by the robot - choose whichever you find best.

3. For each Tax ID:

- Navigate to Vendors - Search page (click or hover over the Vendors menu item and then click on Search for Vendor);
- Type the Tax ID into the Vendor Tax ID field;
- Click on Search;
- Extract the values for the Vendor, City and Country and compare them with the values from the previously extracted table from the Display All Vendors page (check for EXACT match for all fields!);
- If the values are not matching, this should be categorized as a Business Rule Exception;
- If the City does NOT belong to the group {"Paris", "Bucuresti", "Moscow", "Stuttgart", "Koln"}, this should be categorized as the second Business Rule Exception. We can only process requests from these cities. Check the City value extracted after the individual Tax ID search;
- If no Business Rule Exception, Append the resulting datatable from each page into an Excel worksheet; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a DataRow. The process should recover and retry 2 times in case of errors in navigation between the Vendor Search and Vendor Search Results pages. One transaction is the action of navigating to the Vendor Search page, searching for the TaxID and scraping the values from the resulting one row table. (Similar to ACME Process 5 from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
3. Create a separate workflow file for closing ACME.
4. Add the ACME_URL and ACME_Credential to the Excel Config file.
5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
8. Populate the Process.xaml file with the following actions: Navigation, Searching for TaxID, Scraping, Checking if the values match, Checking for the correct City, Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

A. Send us your feed back on this

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 21

What is the purpose of the WaitForReady property in any UiAutomation activity?

Options are :

- A.** Specifies the amount of time (in milliseconds) to wait for the activity to run before an error is thrown.
- B.** Before performing the actions, waits for the target to become ready.
- C.** Specifies to continue executing the remaining activities even if the current activity failed.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 22

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click on the Work items menu item. Scrape the data in all the pages of the table, page by page, ensuring error handling and recovery.
3. For each page:
 - Filter the records where Status is 'Open';
 - Filter the records where Type is 'WI5';
 - Filter the records where WIID is less than 500000;
 - Append the resulting datatable into an Excel worksheet; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a String. The process should recover and retry in case of errors in navigation between WorkItems page. One transaction is the action of scraping one web page. By navigating to the next page, the next transaction will execute. (Same as ACME Process 4 Dispatcher from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
3. Create a separate workflow file for closing ACME.
3. Add the ACME_URL and ACME_Credential to the Config file.
4. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
5. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
6. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
7. Populate the Process.xaml file with the following actions: Web scraping, Filtering and Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Good luck!

Options are :

ALL THE BEST!

A. Send us your feed back on this

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 23

The return value of the Get Transaction Item activity is of the following type:


Options are :

- A.** String
- B.** Object
- C.** QueueItem
- D.** List

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 24

Based on the configuration shown in the exhibit, what is the result of the execution of these activities if the target element does not exist at runtime?

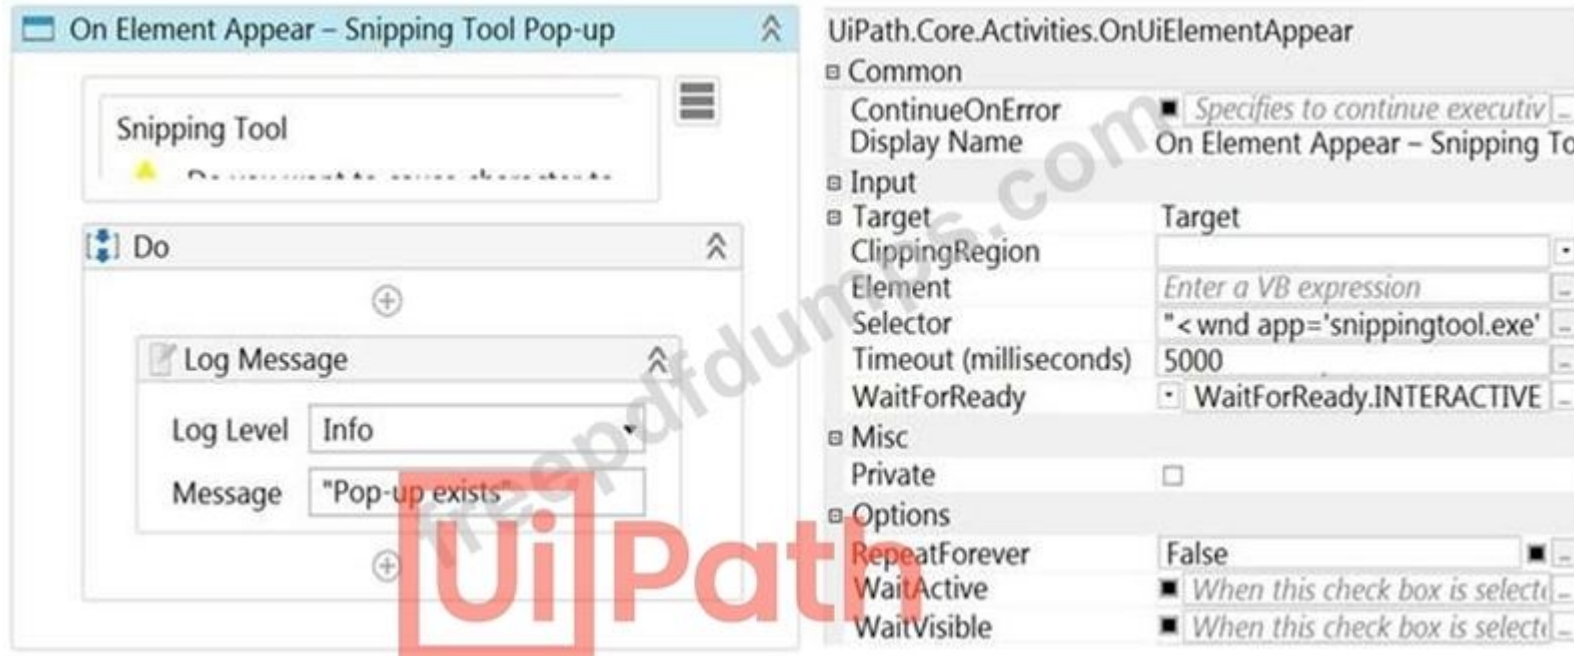

- A. Robot continues to look for the target element until the execution is manually stopped
- B. Activity Timeout Exceeded error is received
- C. Execution completes successfully without logging a message
- D. "Pop-up exists" message is logged

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 25

Which of the following are considered best practices?

Options are :

- A. Start your new sequence with a short annotation meant to explain the purpose of the workflow.
- B. Think about the exceptions that might occur during the execution of the process.
- C. Include a Should Stop activity at the end of the workflow.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 26

If a developer wants to use a variable of type UIElement to identify a button in a Click activity, which property must be manually configured during development?

- A. WaitForReady
- B. ClippingRegion
- C. Element
- D. Selector

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 27

What activity can you use to get a column value from a specific row of a DataTable?

Options are :

- A. Row Read Cell
- B. Get Row Item
- C. Remove Data

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 28

In the UiPath Robotic Enterprise Framework template, if a System Error is encountered in the Process Transaction state of the Main workflow, which state is executed next?

Options are :

- A. Init
- B. Get Transaction Data
- C. End Process

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 29

A developer needs to create a process that performs the following:

1. Scrapes a table of common English-Spanish translations
2. Writes the table to an Excel file
3. Emails that Excel file as an attachment

While creating this process, the developer notices that two activities with the same name can write the scraped DataTable to Excel.

What are the differences between the Workbook and Excel Write Range activities?

A. Excel Write Range activity will create the file in the WorkbookPath property if it does not exist. Workbook Write Range activity can only be used when Excel is installed.

B. Excel Write Range activity can only be used when Excel is installed.

Workbook Write Range activity can be faster by writing the data directly to the file.

C. Excel Write Range activity only works in the background.

Workbook Write Range activity will create the file in the WorkbookPath property if it does not exist.

D. Excel Write Range activity only works in the foreground, visible to the user. Workbook Write Range activity only works in the background.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 30

Where should Credentials be stored?

Options are :

- A. In Orchestrator as assets
- B. Directly inside the workflows as variables
- C. In Windows Credential Store

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 31

Where can you find the value written by the Write Line activity?

Options are :

- A.** In the Output pane
- B.** In a variable
- C.** At console

Answer: A ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:

https://www.actual4test.com/UiPath-ARDv1_examcollection.html (**340** Q&As Dumps, **30%OFF** Special Discount:

Freepdfdumps)

NEW QUESTION: 32

What recording wizard would you use to automate UI interactions in an application that does not offer support for selectors?

Options are :

- A.** Citrix Recording
- B.** Basic Recording
- C.** Desktop Recording
- D.** Web Recording

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 33

A developer wants to design a process in which multiple decision points will be used to accommodate complex scenarios.

In UiPath Studio, which recommended type of workflow meets this requirement?

- A.** Sequence
- B.** Global Exception Handler
- C.** State Machine
- D.** Flowchart

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 34

A developer configured the Activity Project Settings for a UI automation and a Click activity in the project shown in the following exhibits:

DelayBefore	
Production value	Debug value
200	200
DelayAfter	
Production value	Debug value
300	300
Timeout (milliseconds)	
Production value	Debug value
20000	10000
WaitForReady	
Production value	Debug value
INTERACTIVE	INTERACTIVE

Properties

UiPath.Core.Activities.Click

Common

ContinueOnError ☒ Specifies to continue executiv ...

DelayAfter Delay time (in milliseconds) afte ...

DelayBefore Delay time (in milliseconds) befc ...

Display Name Click 'SnippingTool.exe Snippi...'

Input

ClickType ClickType.CLICK_SINGLE ...

MouseButton MouseButton.BTN_LEFT ...

Target

ClippingRegion

Element Enter a VB expression ...

Selector "< wnd app='snippingtool.exe' ...

Timeout (milliseconds) 15000 ...

WaitForReady WaitForReady.INTERACTIVE ...

If the target element is not found during execution in Debug mode, how long will it take until an error is thrown?

- A. 30 seconds
- B. 15 seconds
- C. 10 seconds
- D. 20 seconds

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 35

A developer creates a Dispatcher which extracts information from the top 30 mail messages in Microsoft Outlook and uploads that information into a queue.

What is the recommended way to avoid processing duplicates of the same Queue Items?

- A.** Add a descriptive "Reference" in the "Add Queue Item" activity and check that it does not equal the "Reference" of the Queue Item last processed.
- B.** Set the "Unique Reference" of the queue to "Yes" and "Auto Retry" of the queue to "No".
- C.** Create an Excel file of processed Queue Items and loop through the list to check if the current Queue Item has been processed before.
- D.** Set the "Unique Reference" of the queue to "Yes" and add a descriptive "Reference" in the "Add Queue Item" activity.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 36

Which of the statuses below can a transaction have? Select all the options that apply.

Options are :

- A.** Abandoned
- B.** Deleted
- C.** Successful
- D.** Retried
- E.** Failed
- F.** New
- G.** Pending
- H.** In progress

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 37

Which of the following types of variables can be defined in UiPath Studio?

Options are :

- A.** Number.
- B.** DataTable
- C.** GenericValue.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 38

A developer created a custom rule for Workflow Analyzer and wants to make it available only at the project level.

Which action should the developer perform?

- A.** Create a Nuget package (.nupkg) of the rule and publish it to Orchestrator.
- B.** Create an external assembly (.dll) of the rule and copy it to the Studio install location.
- C.** Create an external assembly (.dll) of the rule and copy it to the project location.
- D.** Create a Nuget package (.nupkg) of the rule and install it in a Studio project as a dependency.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 39


You recently observed a developer using the SecureString variable type in their workflow. What is a UiPath best practice relative to the use of SecureString?

- A.** Name of the SecureString variable should include the prefix "str_".
- B.** SecureString variable scope should be limited to the scope where it is created.
- C.** SecureString variable should be assigned to an argument.
- D.** A workflow file should not contain more than one SecureString variable.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 40

A developer reviewed the following sequence:

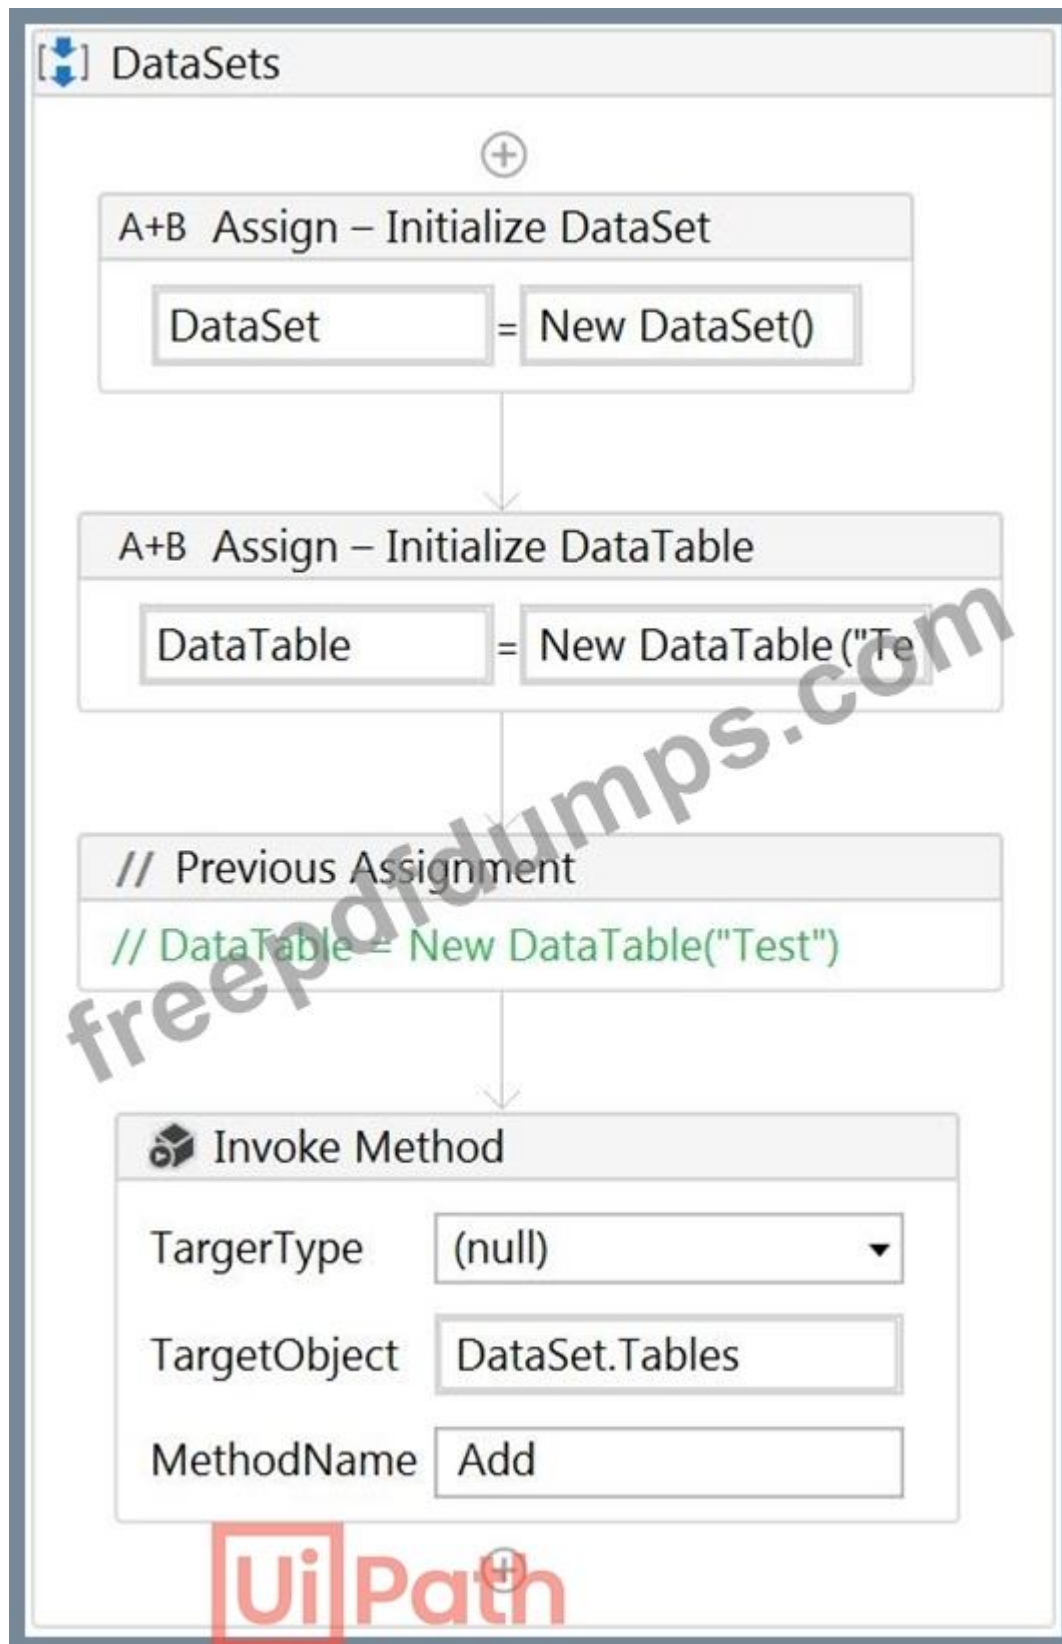

The parameters of the Invoke Method are:

Parameters

Direction	Type	Value
In	DataTable	DataTable
<i>Create Argument</i>		

OK Cancel

Properties

System.Activities.Statements.InvokeMethod

Common

DisplayName Invoke Method

Misc

GenericTypeArguments (Collection) ...

MethodName Add ...

Parameters (Collection) ...

Private ☐

Result *Enter a VB expression* ...

RunAsynchronously ☐

TargetObject DataSet.Tables ...

TargetType (null) ▼

In order to get the table name of the first element in the DataSet, which expressions should the developer use?

- A. DataSet.Rows(0).TableName
- B. DataSet.Tables(0).TableName
- C. DataSet.Rows(1).TableName
- D. DataSet.Tables(1).TableName

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 41

Where can you trigger an unattended robot from? Select all the options that apply.

Options are :

- A. Remotely, from Orchestrator
- B. UiPath Studio
- C. The UiPath Robot icon in the system tray

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 42

A developer needs to create an automation process that identifies a file with format "Monthly_Report_MMddyyyy.xlsx". The file name is saved to a variable called strinput.

To extract the date from strinput, which string manipulation method should be used?

- A. strinput.Substring(strInput.IndexOf("_")+1,8)
- B. strinput.Substring(strInput.LastIndexOf("_")+1,8)
- C. strinput.Substring(strInput.IndexOf("_")+1,strInput.IndexOf(".")+1)
- D. strinput.Substring(strInput.IndexOf("_")+1,strInput.IndexOf("."))

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 43

What kind of workflow should you create to define business rules?

Options are :

- A. State machine
- B. Flowchart
- C. Sequence

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 44

In a Robotic Enterprise (RE) Framework project that is connected to Orchestrator, what is the correct sequence of steps if an application exception occurs on a Queue Item in the Process Transaction state?

NOTE: Drag the Description found on the "Left" and drop on the correct Step Sequence found on the "Right".

Description

Take a screenshot

Execute the Init State

Set Transaction Status to "Failed"

Process another Queue Item, if one exists

Close All Applications or Kill Applications

Step Sequence

Step 1:

Step 2:

Step 3:

Step 4:

Step 5:

Answer:

<u>Description</u>	<u>Step Sequence</u>
Take a screenshot	Step 1: Execute the Init State
Execute the Init State	Step 2: Take a screenshot
Set Transaction Status to "Failed"	Step 3: Close All Applications or Kill Applications
Process another Queue Item, if one exists	Step 4: Process another Queue Item, if one exists
Close All Applications or Kill Applications	Step 5: Set Transaction Status to "Failed"

NEW QUESTION: 45

What is the best way of restricting the access of a person to a limited number of pages in Orchestrator?

Options are :

- A. By creating a different account and role for that person. When creating a new role, restrictions can be applied.
- B. That option does not exist. Everyone is able to see everything
- C. By changing the rights of the Administrator to the desired state.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 46

In the Robotic Enterprise (RE) Framework, what is the initial value of TransactionNumber?

- A. 0
- B. []
- C. 1
- D. Nothing

Answer: D ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:

https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount:

Freepdfdumps)

NEW QUESTION: 47

What happens if the ClickBeforeTyping property in a Type Into activity is selected?

Options are :

- A. Before typing, a click is performed on the top left corner of the UiElement.
- B. Before typing, a click is performed at the current mouse position.

C. Before typing, a click is performed at the center of the UiElement.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 48

Which of the following are considered best practices?

Options are :

- A. Deleting disabled code.
- B. Leaving target applications opened.
- C. Removing unreferenced variables.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 49

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click on the Work items menu item. Scrape the data in all the pages of the table, page by page, ensuring error handling and recovery.
3. For each page: - Filter the records where Status is 'Open';
 - Filter the records where Type is 'WI1';
 - Filter the records where WIID is greater than 200000;
 - Append the resulting datatable into an Excel worksheet, you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a String. The process should recover and retry in case of errors in navigation between WorkItems page. One transaction is the action of scraping one web page. By navigating to the next page, the next transaction will execute. (Same as ACME Process 4 Dispatcher from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
3. Create a separate workflow file for closing ACME
4. Add the ACME_URL and ACME_Credential to the Config file.
5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
8. Populate the Process.xaml file with the following actions: Web scraping, Filtering and Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Good luck!

ALL THE BEST!

A. Send us your feed back on this

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 50

When should the "Add Log Fields" activity be used?

Options are :

- A. When a log message with a maximum number of five visible fields needs to be generated
- B. When logs need to be enabled
- C. When the standard log message has to be customized by adding new fields to it

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 51

How can you identify a column in a DataTable?

Options are :

- A. By using the column default value.
- B. By using the column name.
- C. By using the row index.
- D. By using the column index.

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 52

Is it possible to reprocess a transaction in a Queue after its failure due to an application exception?

Options are :

- A. Yes, it can be retried manually on the Transactions page.
- B. Yes, if the Auto-Retry property of the Queue is enabled.
- C. No, transactions cannot be processed again if they fail.
- D. Only transactions that failed due to a business exception can be reprocessed.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 53

The String.Format("Input = {0} and Output = {1}", "1","2") expression returns the following text:

Options are :

- A. Input = 0 and Output = 0
- B. Input = 1 and Output = 1
- C. Input = 1 and Output = 2
- D. Input = {0} and Output = {1}

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 54

Which of the following are considered best practices? Select all the options that apply.

Options are :

- A. Breaking the process into smaller workflows.
- B. Keeping environment settings hard coded inside workflows.
- C. Reusing workflows across different projects.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 55

What do the Items in the Orchestrator queues consist of? Select all the options that apply.

Options are :

- A.** Input data for the processes executed by the robots
- B.** Processes to be executed by the robots
- C.** Jobs to be executed by the robots

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 56

You want to identify a selector for a button in an application. The selector will be used as the target in a Click activity.

In order to ensure the Click activity executes as intended, how many elements should the selector be valid for at runtime?

- A.** 3 elements
- B.** 5 elements
- C.** 2 elements
- D.** 1 element

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 57

Which Queue Item properties can be used to control the order in which the items are processed?

Options are :

- A.** Priority
- B.** Deadline
- C.** Postpone
- D.** ItemInformation

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 58

The String.Format("Input ={0} and Output = {0}", "1","2") expression returns the following:

Options are :

- A.** Input = 1 and Output = 1
- B.** Input ={0} and Output = {0}
- C.** Input = 1 and Output = 2
- D.** Input ={1} and Output = {2}

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 59

Which is considered to be one of the best practices regarding the process ?nalization?

Options are :

- A.** Leave the used applications open so that person can Inspect me result

- B. Leave the application In its initial state, so that we can execute the process again
- C. Restart the machine so that any potential problem can be fixed

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 60

In the UiPath Robotic Enterprise Framework template, in the Get Transaction Data state of the Main workflow, what happens before the next transaction item is retrieved?

Options are :

- A. We check if a stop signal was sent from Orchestrator
- B. We check if the previous transaction has been completed
- C. We check if a kill signal was sent from Orchestrator

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 61

How can you find all anchor elements in a web page?

Options are :

- A. Using the Get Ancestor Activity
- B. Using the Find Children Activity
- C. Using the Find Relative Element Activity
- D. Using the Find Element Activity

Answer: B ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:

https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount:

Freepdfdumps)

NEW QUESTION: 62

Where should credentials be stored? Select all the options that apply.

Options are :

- A. In Windows Credential Store.
- B. In Orchestrator, as assets.
- C. Directly inside the workflows, as variables.

Answer: A,C ([LEAVE A REPLY](#))

Topic 2, Case Study

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click on the Work items menu item. Scrape the data in all the pages of the table, page by page, ensuring error handling and recovery.
3. For each page: - Filter the records where Status is 'Open';
 - Filter the records where Type is 'WI1';
 - Filter the records where WIID is greater than 200000;
 - Append the resulting datatable into an Excel worksheet, you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFramework:

1. TransactionItem datatype should be a String. The process should recover and retry in case of errors in navigation between WorkItems page. One transaction is the action of scraping one web page. By navigating to the next page, the next transaction will execute. (Same as ACME Process 4 Dispatcher from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password.
3. Create a separate workflow file for closing ACME.
4. Add the ACME_URL and ACME_Credential to the Config file.
5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
8. Populate the Process.xaml file with the following actions: Web scraping, Filtering and Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets).

Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Good luck!

ALL THE BEST!

Send us your feedback on this.

NEW QUESTION: 63

What is the best practice to stop an ongoing job in Orchestrator?

Options are :

- A. By cancelling it and using a Should Stop activity inside the workflow.
- B. The process can only stop on its own.
- C. By terminating it.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 64

Scheduling a process is done from:

Options are :

- A. Not Possible
- B. UiPath Studio
- C. UiPath Robot
- D. Orchestrator Server

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 65

Consider three GenericValue variables, var1 with the default value of "3 apples", var2 with the default value of "5 mangos", and the result, which is the output of an Assign Activity with the var1 + var2 expression. What is the value of the resulting variable Options are :

- A. "8 fruits"
- B. 8
- C. Null
- D. "3 apples5 mangos"
- E. Error: "Input string was not in a correct format"

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 66

What is the difference between a Click activity whose SimulateClick property is checked and another one with the same property unchecked?

Options are :

- A. The activity with an enabled SimulateClick flag does not click the target element, it just simulates the action.
- B. The activity with the SimulateClick flag unchecked moves the mouse cursor over the target element, while the one with the flag set does not move the mouse cursor.
- C. There is no difference - both can be used in same scenarios.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 67

Which file in the Robotic Enterprise (RE) Framework reads the Data/Config.xlsx file and retrieves assets from Orchestrator into the process?

- A. InitAllApplications.xaml
- B. Process.xaml
- C. KillAllProcesses.xaml
- D. InitAllSettings.xaml

Answer: A ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:

https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount:

Freepdfdumps)