

UiPath.UiPath-ARDv1.v2022-09-09.q68

Exam Code:	UiPath-ARDv1
Exam Name:	UiPath Advanced RPA Developer v1.0 Exam (UiARD)
Certification Provider:	UiPath
Free Question Number:	68
Version:	v2022-09-09
# of views:	1919
# of Questions views:	680
https://www.freepdfdumps.com/UiPath.UiPath-ARDv1.v2022-09-09.q68.html	

NEW QUESTION: 1

Based on the exhibit that represents the "Deadline" in the yyyy-mm-dd format, what is the correct sequence in which the Queue Items are processed by a single Performer workflow?

NOTE: Drag the Queue Item Name found on the "Left" and drop on the correct Process Order found on the "Right"

<u>Queue Item Name</u>	<u>Process Order</u>
EmployeeID1	First:
EmployeeID2	Second:
EmployeeID3	Third:
EmployeeID4	Fourth:
EmployeeID5	Fifth:

Answer:

<u>Queue Item Name</u>	<u>Process Order</u>
EmployeeID1	First: EmployeeID2
EmployeeID2	Second: EmployeeID3
EmployeeID3	Third: EmployeeID5
EmployeeID4	Fourth: EmployeeID1
EmployeeID5	Fifth: EmployeeID4

NEW QUESTION: 2

In the UiPath Robotic Enterprise Framework template, in the Main workflow, the State Machine includes the following states:

Options are :

- A. Get transaction data state
- B. Init state
- C. Set Transaction State
- D. Process Transaction State
- E. End Process State

Answer: A,B,D,E ([LEAVE A REPLY](#))

NEW QUESTION: 3

What is the best way to select a row with a certain value from a column in Excel?

Options are :

- A. Use a Read Range Activity to retrieve the contents of the Excel file, and then use a Select Method to identify the desired row
- B. Use a Read Range Activity to retrieve the contents of the Excel file, and then use a For Each activity loop to iterate through the data and identify
- C. Use the Find functionality from Excel

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 4

How can a string variable called myString be converted to an all-capitals representation for future use?

Options are :

- A. By using a Write Line with the Text property set to myString.ToUpper.
- B. By using an Assign activity with myString on the left side and myString.ToUpper on the right side

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 5

In the UiPath Robotic Enterprise Framework template, if a System Error is encountered in the Process Transaction state of the Main workflow, which state is executed next?

Options are :

- A. Get Transaction Data
- B. Init
- C. End Process

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 6

What happens in the Init state of the Main workflow, in the UiPath Robotic Enterprise Framework template?

Options are :

- A. The robot reads the configuration file and initializes all the required applications.
- B. The transaction items are extracted from the Queue.
- C. The robot checks if the previous transaction is complete and then starts the next one.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 7

A developer plans to create a process to automate a web application. The web application requires HTML buttons and text boxes to be loaded. Although some assets may still be loading, the robot should perform the UI actions once the buttons and text boxes are loaded.

Which property should be configured?

- A. TimeoutMS = 10000
- B. TimeoutMS = Int32.MaxValue
- C. WaitForReady = Complete
- D. WaitForReady = Interactive

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 8

What is the difference between a Click activity whose SimulateClick property is checked and another one with the same property unchecked?

Options are :

- A. There is no difference - both can be used in same scenarios.
- B. The activity with an enabled SimulateClick flag does not click the target element, it just simulates the action.
- C. The activity with the SimulateClick flag unchecked moves the mouse cursor over the target element, while the one with the flag set does not move the mouse cursor.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 9

Practical exam questions is different for different people, so solution cant be shared but as i have promised that i will help in practical exam, You can mail me at learnautomationr@gmail.com and i will help you to clear practical exam also.

Options are :

- A. Understood
- B. Answer :Understood

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 10

What is an argument?

Options are :

- A. A variable
- B. An input/output parameter of the workflow
- C. A variable type

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 11

A developer was assigned a task to build a process that will interact with hidden or minimized windows on an employee's machine.

To ensure the UI automation runs in the background which commonly used activity property must always be avoided?

- A. Activate
- B. Simulate Type
- C. Default
- D. SendWindowMessages

Answer: B [\(LEAVE A REPLY\)](#)

NEW QUESTION: 12

In UiPath Studio, what describes project validation and workflow analysis?

- A. Validation of the file or project is performed after the Workflow Analyzer finishes the report.
- B. Validation of the file or project is performed only if the user triggers Validate File and Validate Project.
- C. Validation of the file or project is performed whenever the Workflow Analyzer is triggered.
- D. Validation of the file or project is performed only when running or debugging.

Answer: C [\(LEAVE A REPLY\)](#)

NEW QUESTION: 13

In a Try Catch activity, how many times is the Finally section executed if no error occurs in the Try section?

Options are :

- A. Once
- B. The Finally section is executed only when the Catch section is executed.
- C. Zero

Answer: A [\(LEAVE A REPLY\)](#)

NEW QUESTION: 14

A developer met with a rental car company to review their business requirements which takes reservations from a Microsoft Outlook email box. The company has indicated the following occurs in their application:

1. Login to the rental car company's desktop application
2. Navigate to the Rental Requests section

3. Get emails from their Microsoft Outlook account
4. Extract data from the current email and add it to the queue
5. For each Queue Item:
 - a) Navigate to the Reservations section
 - b) Add the booking details into the Reservations section
 - c) Close the current reservation and move to a new one
6. Log out and close the company's application

The developer needs to create a process using the Dispatcher/Performer architecture for the company. Which steps will be included in the Dispatcher process?

- A. 1-3
- B. 1-4
- C. 3-6
- D. 3-4

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 15

What activity can you use to get a column value from a specific row of a DataTable?

Options are :

- A. Remove Data
- B. Get Row Item
- C. Row Read Cell

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 16

If a large item collection is processed using For Each, which activity enables you to efficiently exit the loop after a specific moment?

Options are :

- A. No activity can be used. Instead, you have to create a Boolean variable based on which the For Each loop is broken
- B. A While loop should be used instead of For Each
- C. The "Break" activity is the most suitable in For Each

Answer: C ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here:

Special Discount: **Freepdfdumps**)

NEW QUESTION: 17

How should a UiPath developer handle frequent changes in the project files?

Options are :

- A. Old versions of the project files are not relevant
- B. By creating daily backups of the files
- C. By using a source control solution, such as SVN, TFS, etc.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 18

What are the uses of web scraping in UiPath?

Options are :

- A. Extracting lists or other structured data from a web page
- B. Extracting the images from a webpage
- C. Extracting all the information from a web page
- D. Extracting the content of a table from a web page

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 19

Which of the following technologies can be used for background automation?

Options are :

- A. The Click activity with the Simulate Click flag checked.
- B. Type into activity with SendWindowMessages flag checked.
- C. Data Scraping.
- D. The Full Text method of Screen Scraping.

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 20

Can you run multiple instances of the same process, in parallel?

Options are :

- A. Yes, on different robots.
- B. Yes, on the same robot.
- C. No

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 21

In which workflow in the UiPath Robotic Enterprise Framework template is the retry mechanism implemented?

Options are :

- A. The Main workflow
- B. The GetTransactionData workflow
- C. The SetTransactionStatus workflow

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 22

In a Robotic Enterprise (RE) Framework project that is connected to Orchestrator, what is the correct sequence of steps if an application exception occurs on a Queue Item in the Process Transaction state?

NOTE: Drag the Description found on the "Left" and drop on the correct Step Sequence found on the "Right".

Description	Step Sequence
Take a screenshot	Step 1:
Execute the Init State	Step 2:
Set Transaction Status to "Failed"	Step 3:
Process another Queue Item, if one exists	Step 4:
Close All Applications or Kill Applications	Step 5:

Answer:

Description	Step Sequence
Take a screenshot	Step 1: Execute the Init State
Execute the Init State	Step 2: Take a screenshot
Set Transaction Status to "Failed"	Step 3: Close All Applications or Kill Applications
Process another Queue Item, if one exists	Step 4: Process another Queue Item, if one exists
Close All Applications or Kill Applications	Step 5: Set Transaction Status to "Failed"

NEW QUESTION: 23

What can be used to debug a workflow?

Options are :

- A. The Slow Step option.
- B. Breakpoints
- C. Highlighting activities.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 24

Where should credentials be stored? Select all the options that apply.

Options are :

- A. In Orchestrator, as assets.
- B. In Windows Credential Store.

C. Directly inside the workflows, as variables.

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 25

Which of the following are considered best practices?

Options are :

- A. Start you new sequence with a short annotation meant to explain the purpose of the workflow
- B. Include a Should Stop activity at the end of the workflow
- C. Think about the exception that might occur during the execution of the process

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 26

In which types of variable can you store text?

Options are :

- A. Integer
- B. Generic
- C. Double
- D. String

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 27

In the UiPath Robotic Enterprise Framework template, in the Get Transaction Data state of the Main workflow, what happens before the next transaction item is retrieved?

Options are :

- A. We check if a kill signal was sent from Orchestrator
- B. We check if the previous transaction has been completed
- C. We check if a stop signal was sent from Orchestrator

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 28

In which workflow in the UiPath Robotic Enterprise Framework template is the TransactionNumber global variable incremented by default?

Options are :

- A. Process workflow
- B. SetTransactionStatus workflow
- C. GetTransactionData workflow

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 29

Which one of the statements below regarding the GetAppCredentials workflow included in UiPath Robotic Enterprise Framework is true?

Options are :

- A. It first requests the credential from user.
- B. It first tries to fetch a credential from Orchestrator.
- C. It first tries to fetch a credential from the Windows Credential Manager.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 30

While automating an installation wizard, a pop-up window may or may not appear. What can you use to close the window without stopping the workflow?

Options are :

- A. Use a Click activity inside a Try Catch activity.
- B. Use a Click activity with the ContinueOnError property set to True.
- C. Use a Click activity and set its TimeoutMS property to 30.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 31

How should exceptions be handled? Select all the options that apply.

Options are :

- A. UiPath handles exceptions by default.
- B. By using Try Catch activities inside the workflow for unexpected application exceptions.
- C. By validating data using conditional blocks for business exceptions.

Answer: B,C ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here: https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount: **Freepdfdumps**)

NEW QUESTION: 32

Why is renaming activities considered to be one of the best practices?

Options are :

- A. In case of an exception, to be able to find its source activity
- B. To easily understand the high-level business logic from a workflow.
- C. To be able to understand the process logic without expanding each sequence or invoked workflow.

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 33

Which of the following are considered best practices? Select all the options that apply.

Options are :

- A. Keeping environment settings hard coded inside workflows.
- B. Reusing workflows across different projects.
- C. Breaking the process into smaller workflows.

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 34

Can you store a Selector in a variable?

Options are :

- A. No
- B. Yes, in a UiElement variable.
- C. Yes, in a String variable

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 35

The String.Format("Input ={0} and Output = {0}", "1","2") expression returns the following:

Options are :

- A. Input = 1 and Output = 1
- B. Input = 1 and Output = 2
- C. Input ={1} and Output = {2}
- D. Input ={0} and Output = {0}

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 36

Which activity provides the easiest way to loop through all the rows in a DataTable?

Options are :

- A. Repeat Until
- B. For Each Row
- C. While
- D. For Each
- E. Do While

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 37

A developer needs to reference the element in the first row of the "ID" column in the System.Data.DataTable, "DT".

Which expression is used to reference this element?

- A. DT.Rows(1).ID

- B. DT.Rows(1).Item("ID")
- C. DT.Rows(0).Item("ID")
- D. DT.Rows(0).ID

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 38

How can you delay the Automatic Recording?

Options are :

- A. By hitting the F2 key
- B. By right clicking
- C. Not possible
- D. By hitting the Escape key

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 39

Which of the scraping methods can get you the hidden text in the element?

Options are :

- A. OCR
- B. All of the above
- C. FullText
- D. Native

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 40

Which is the best way to navigate to a specific page in a web browser?

Options are :

- A. Use the Navigate To activity inside an Attach Browser container
- B. Use a Type Into activity with a full selector
- C. Use the Type Into activity inside an Attach Browser container

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 41

What represents an example of a full selector?

- A. <html app='chrome.exe' title='Full versus Partial Selectors' />
<webctrl aaname='About Selectors' parentid='content-container' tag='A' />
- B. <wnd aaname='Explorer Pane' cls='DirectUIHWND' />
<ctrl automationid='System.ItemNameDisplay' />
- C. <ctrl name='File' role='popup menu' />
<ctrl automationid='6' />
- D. <webctrl href='/studio/docs/about-licensing' parented='hub-sidebar-content' tag='A' />
<webctrl parented='hub-sidebar-content' tag='SPAN' />

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 42

A developer wants to use the Dispatcher and Performer architecture.

What describes the characteristics of a Dispatcher and a Performer process?

- A.** Dispatcher is used to process transaction items from an Orchestrator Queue Performer can interact with multiple Orchestrator Queues
- B.** Dispatcher is always created in the REFramework Performer can only interact with one Orchestrator Queue
- C.** Dispatcher can only interact with one Orchestrator Queue Performer is used to process Queue Items one at a time
- D.** Dispatcher is used to add Queue Items to an Orchestrator Queue Performer should be created in the REFramework

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 43

Which activity is used to call another piece of automation?

Options are :

- A.** Flowchart
- B.** Open Application
- C.** Invoke Workflow File

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 44

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click or hover over the Vendors menu item and then click on Search for Vendor. Click on Display All Vendors. Scrape the data from the whole table isplayed. The resulting datatable will be used as the input data for the process. Navigate back to the dashboard.

Note: Navigation can be achieved in multiple ways by the robot - choose whichever you find best.

3. For each Tax ID:

- Navigate to Vendors - Search page (click or hover over the Vendors menu item and then click on Search for Vendor);
- Type the Tax ID into the Vendor Tax ID field;
- Click on Search;

- Extract the values for the Vendor, City and Country and compare them with the values from the previously extracted table from the Display All Vendors page (check for EXACT match for all fields!);
- If the values are not matching, this should be categorized as a Business Rule Exception;
- If the City does NOT belong to the group {"Paris", "Bucuresti", "Moscow", "Stuttgart", "Koln"}, this should be categorized as the second Business Rule Exception. We can only process requests from these cities. Check the City value extracted after the individual Tax ID search;
- If no Business Rule Exception, Append the resulting datatable from each page into an Excel worksheet; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a DataRow. The process should recover and retry 2 times in case of errors in navigation between the Vendor Search and Vendor Search Results pages. One transaction is the action of navigating to the Vendor Search page, searching for the TaxID and scraping the values from the resulting one row table. (Similar to ACME Process 5 from the UiPath Academy).
 2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
 3. Create a separate workflow file for closing ACME.
 4. Add the ACME_URL and ACME_Credential to the Excel Config file.
 5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
 6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
 7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
 8. Populate the Process.xaml file with the following actions: Navigation, Searching for TaxID, Scraping, Checking if the values match, Checking for the correct City, Appending to Excel.
- Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

A. Send us your feed back on this

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 45

A developer uses Workflow Analyzer with the default rules to check if a project follows best practices. In one of the workflows, the Properties of a Click activity is shown in the following exhibit.

Properties

UiPath.Core.Activities.Click

Common

ContinueOnError	Specifies to continue execution if an error occurs	☐	...
DelayAfter		3000	...
DelayBefore	Delay time (in milliseconds)		...
Display Name	Click Calculator button		

Input

ClickType	ClickType.CLICK_SINGLE	...
MouseButton	MouseButton.BTN_LEFT	...

Target

Target

Misc

Private	☐
---------	--------------------------

Options

AlterIfDisabled	If selected, the simulated click will be performed even if the target is disabled	☐	...
CursorPosition	CursorPosition		
KeyModifiers	KeyModifiers.None	...	
SendWindowMessages	If selected, the click is executed by sending window messages	☐	...
SimulateClick	True	☒	...

Which warning will be shown in the Analyzer output for this activity?

- A. Hardcoded delays used in activity Click Calculator button
- B. Timeout values is not defined in activity Click Calculator button
- C. SendWindowMessages not checked in activity Click Calculator button
- D. Activity Click Calculator button has a default name

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 46

In the UiPath Robotic Enterprise Framework template, if a System Error is encountered in the Init state of the Main workflow, which state is executed next?

Options are :

- A. End Process
- B. Init
- C. Get Transaction Data

Answer: ([SHOW ANSWER](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here: https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount: **Freepdfdumps**)

NEW QUESTION: 47

In the UiPath Robotic Enterprise Framework template, what happens if the processing of a transaction item falls with an Application Exception of a System Error?

Options are :


- A. The execution of the transaction item is retried if the MaxRetryNumber config value is greater than 0
- B. The process executes the End Process state
- C. All use application are closed and then re-initialized

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 48

A developer reviewed the following sequence:

[+] DataSets

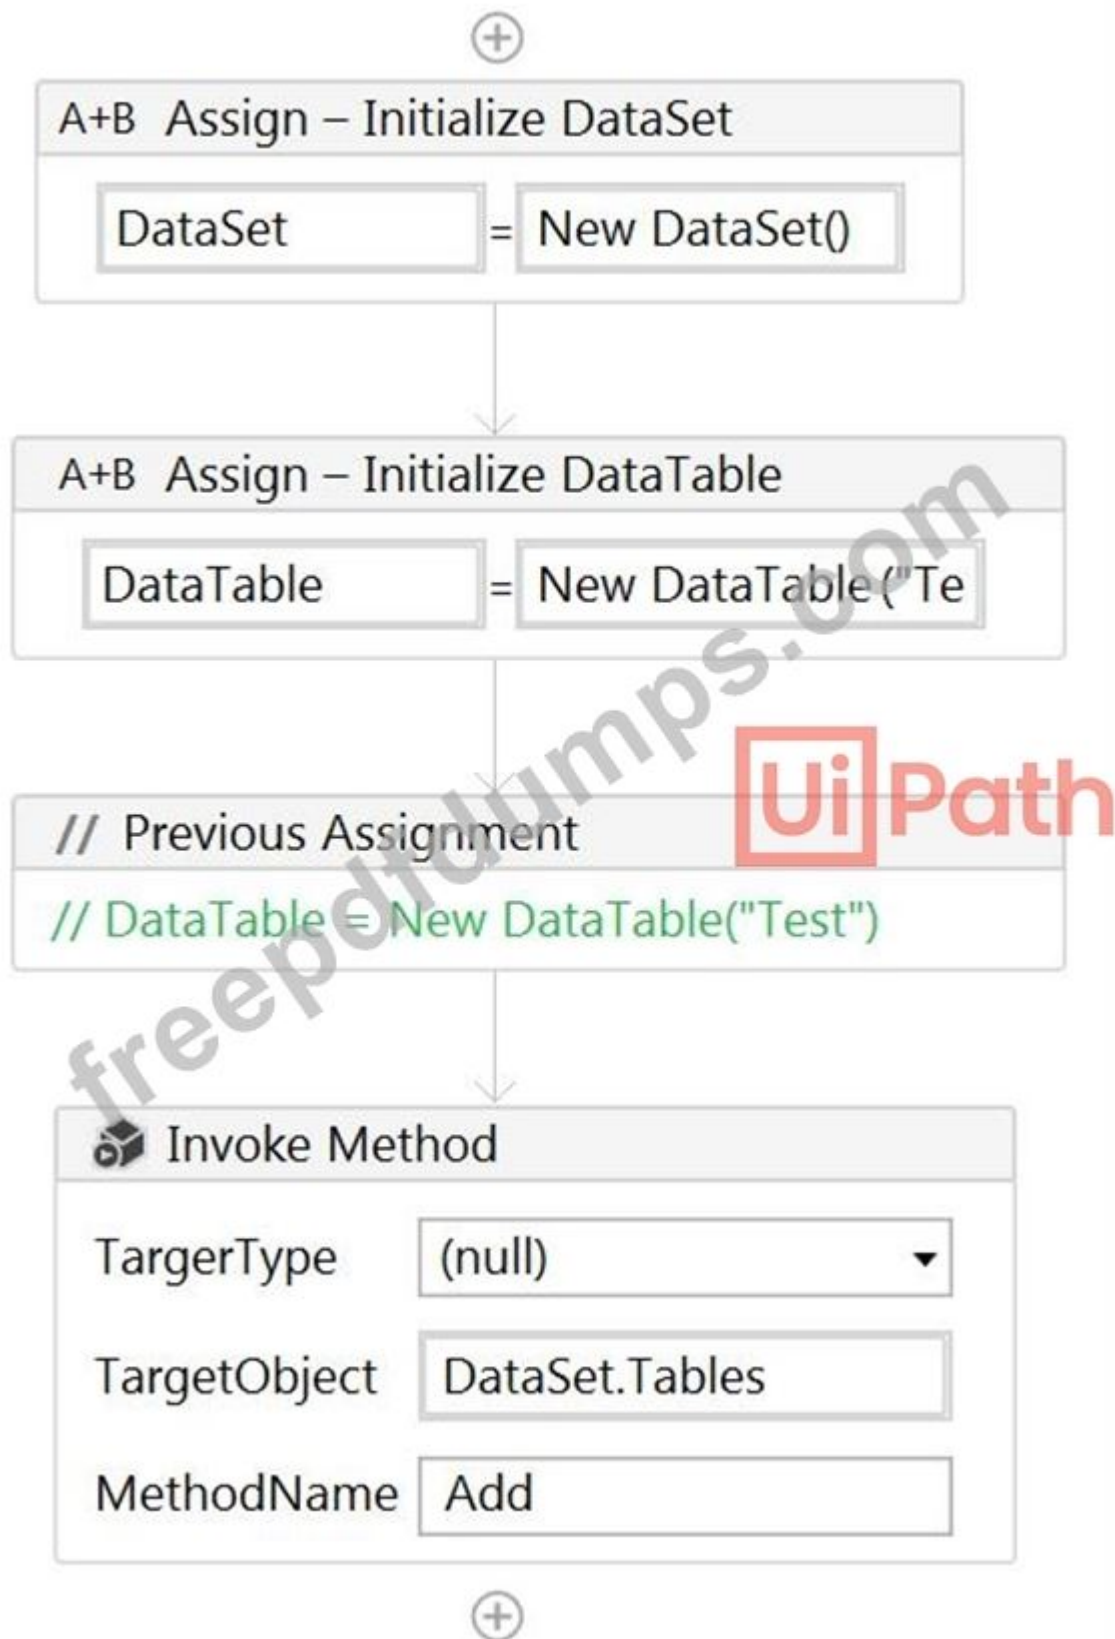

The parameters of the Invoke Method are:

Parameters

Direction	Type	Value
In	DataTable	DataTable

Create Argument

OK Cancel

Properties

System.Activities.Statements.InvokeMethod

Common

DisplayName Invoke Method

Misc

GenericTypeArguments (Collection)

MethodName Add

Parameters (Collection)

Private ☐

Result Enter a VB expression

RunAsynchronously ☐

TargetObject DataSet.Tables

TargetType (null)

In order to get the table name of the first element in the DataSet, which expressions should the developer use?

- A. DataSet.Rows(1).TableName
- B. DataSet.Rows(0).TableName
- C. DataSet.Tables(1).TableName
- D. DataSet.Tables(0).TableName

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 49

What types of assets can be stored in Orchestrator?

Options are :

- A. Array, Datatable, Bool, String
- B. Integer, Password, GenericValue, String
- C. Bool, String, Integer, Credential

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 50

What is the best way of restricting the access of a person to a limited number of pages in Orchestrator?

Options are :

- A. By changing the rights of the Administrator to the desired state.

B. By creating a different account and role for that person. When creating a new role, restrictions can be applied.

C. That option does not exist. Everyone is able to see everything

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 51

In the Robotic Enterprise (RE) Framework, what is the initial value of TransactionNumber?

A. 0

B. []

C. 1

D. Nothing

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 52

How can you retrieve the value stored in a Queue Item variable?

Options are :

A. Use the Deserialize Json activity

B. Use the SpecificContent property

C. Use the Deserialize Xml activity

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 53

A database, DT1, is shown in the following exhibit:

DT1		
ID	Name	Department
1	James	Account
2	Mary	Science
3	Patricia	Math
4	Robert	Literature

The Filter Wizard of a Filter Data Table activity is shown below:

Filter Wizard

Input DataTable DT1 Output DataTable DT1

Filter Rows Output Columns

Rows Filtering Mode

☐ Keep ☒ Remove

	Column	Operation	Value		
	"ID"	=	4	x	+
Or	"Name"	Contains	"Patricia"	x	+
Or	"Department"	=	"Account"	x	+

OK Cancel

What is the result after the activity has executed?

- A. DT1 is returned as an empty datatable.
- B. DT1 is overwritten based on the settings of the Filter Wizard.
- C. DT1 is unaffected by the settings of the Filter Wizard.
- D. A runtime error will be thrown.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 54

What is the purpose of the WaitForReady property in any UiAutomation activity?

Options are :

- A. Before performing the actions, waits for the target to become ready.
- B. Specifies to continue executing the remaining activities even if the current activity failed.
- C. Specifies the amount of time (in milliseconds) to wait for the activity to run before an error is thrown.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 55

A developer entered custom values in the Browser property in the UI Automation section of the Activity Project Settings menu.

Which set of activities can be affected by this change?

- A. Navigate To and Attach Browser
- B. Open Browser and Close Tab
- C. Attach Browser and Open Browser

D. Open Browser and Navigate To

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 56

What kind of workflow should you create to define business rules?

Options are :

A. State machine

B. Flowchart

C. Sequence

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 57

What happens if the result of a transaction is not set?

Options are :

A. It is automatically set to Successful after 24 hours

B. The status is "In Progress" for 24 hours, and then it switches to Abandoned

C. It is automatically set to Failed after 24 hours

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 58

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click on the Work items menu item. Scrape the data in all the pages of the table, page by page, ensuring error handling and recovery.
3. For each page:
 - Filter the records where Status is 'Open';
 - Filter the records where Type is 'WI5';
 - Filter the records where WIID is less than 500000;
 - Append the resulting datatable into an Excel worksheet; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a String. The process should recover and retry in case of errors in navigation between WorkItems page. One transaction is the action of scraping one web page. By navigating to the next page, the next transaction will execute. (Same as ACME Process 4 Dispatcher from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
3. Create a separate workflow file for closing ACME.

3. Add the ACME_URL and ACME_Credential to the Config file.
4. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
5. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
6. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
7. Populate the Process.xaml file with the following actions: Web scraping, Filtering and Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Good luck!

Options are :

ALL THE BEST!

A. Send us your feed back on this

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 59

What type of assets can be stored in Orchestrator?

Options are :

A. Integer, Password, GenericValue, String

B. Array, Datatable, Bool, String

C. Bool, String, Integer, Credential

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 60

How can you provide more details to explain the purpose of the activities in a workflow?

Options are :

A. By adding activity Annotations.

B. By using the Comment activity.

C. By using a Comment Out activity.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 61

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFramework as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>

2. On the landing page, Dashboard, click or hover over the Vendors menu item and then click on Search for Vendor. Click on Display All Vendors. Scrape the data from the whole table displayed. The resulting datatable will be used as the input data for the process. Navigate back to the dashboard.

Note: Navigation can be achieved in multiple ways by the robot - choose whichever you find best.

3. For each Tax ID:

- Navigate to Vendors - Search page (click or hover over the Vendors menu item and then click on Search for Vendor);
- Type the Tax ID into the Vendor Tax ID field;
- Click on Search;
- Extract the values for the Vendor, City and Country and compare them with the values from the previously extracted table from the Display All Vendors page (check for EXACT match for all fields!);
- If the values are not matching, this should be categorized as a Business Rule Exception;
- If the City does NOT belong to the group {"Rimini", "Berlin", "Roma", "Iasi", "Koln"}, this should be categorized as the second Business Rule Exception. We can only process requests from these cities. Check the City value extracted after the individual Tax ID search;
- If no Business Rule Exception, Append the resulting datatable from each page into an CSV file; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a DataRow. The process should recover and retry 2 times in case of errors in navigation between the Vendor Search and Vendor Search Results pages. One transaction is the action of navigating to the Vendor Search page, searching for the TaxID and scraping the values from the resulting one row table. (Similar to ACME Process 5 from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .
3. Create a separate workflow file for closing ACME.
4. Add the ACME_URL and ACME_Credential to the Excel Config file.
5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
8. Populate the Process.xaml file with the following actions: Navigation, Searching for TaxID, Scraping, Checking if the values match, Checking for the correct City, Appending to CSV.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Options are :

ALL THE BEST!

A. Send us your feed back on this

Answer: A ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here: https://www.actual4test.com/UiPath-ARDv1_examcollection.html (340 Q&As Dumps, **30%OFF** Special Discount: **Freepdfdumps**)

NEW QUESTION: 62

Which of the statuses below can a transaction have? Select all the options that apply.

Options are :

- A. Pending
- B. Abandoned
- C. Successful
- D. Retried
- E. Deleted
- F. New
- G. In progress
- H. Failed

Answer: B,C,D,E,F,G,H ([LEAVE A REPLY](#))

NEW QUESTION: 63

Is there any way to hide the execution of one activity in the logs?

Options are :

- A. No, but the logs can be manually edited.
- B. Yes, by changing the minLevel property of the "Execution" logger from NLog.config file.
- C. Yes, by checking the Private property of the activity that is to be hidden.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 64

One of the steps in your process is to authenticate on a web application. How can you check if the login succeeded or not?

Options are :

- A. Place the login activities inside a Try-Catch block. An exception is thrown in case a login problem occurs.

B. Use an Element Exist activity to check whether the login succeeded by searching for an element that is only displayed in that case.

C. Check the return value of the Login activity.

Answer: B ([LEAVE A REPLY](#))

Topic 3, Case Study

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

1. Log in to <https://www.acme-test.com>.
2. On the landing page, Dashboard, click on the Work items menu item. Scrape the data in all the pages of the table, page by page, ensuring error handling and recovery.
3. For each page:
 - Filter the records where Status is 'Open';
 - Filter the records where Type is 'WI5';
 - Filter the records where WIID is less than 500000;
 - Append the resulting datatable into an Excel worksheet; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

1. TransactionItem datatype should be a String. The process should recover and retry in case of errors in navigation between WorkItems page. One transaction is the action of scraping one web page. By navigating to the next page, the next transaction will execute. (Same as ACME Process 4 Dispatcher from the UiPath Academy).
2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password.
3. Create a separate workflow file for closing ACME.
3. Add the ACME_URL and ACME_Credential to the Config file.
4. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.
5. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.
6. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.
7. Populate the Process.xaml file with the following actions: Web scraping, Filtering and Appending to Excel.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets).

Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Good luck!

Options are :

ALL THE BEST!

Send us your feedback on this.

NEW QUESTION: 65

A developer needs to automate a process which involves capturing support ticket numbers from the email subject line. For example, the email subject line includes: "Action Required - XA/135" where "XA/135" is the ticket number. The robot should validate the pattern of the ticket number before proceeding.

Which expression exclusively matches the ticket number pattern from the subject line?

A.

RegEx	Value	Quantifiers
Anything	.	Any (0 or more) * + Δ ▽ ×
Literal	/	Exactly 1 + Δ ▽ ×
Digit	\d	Exactly 3 + Δ ▽ ×

B.

RegEx	Value	Quantifiers
One of	[A-Z]\d	Any (0 or more) * + Δ ▽ ×

C.

RegEx	Value	Quantifiers
Digit	\d	Exactly 3 + Δ ▽ ×
Literal	/	Exactly 1 + Δ ▽ ×
Any word character	\w	Exactly 2 + Δ ▽ ×

D.

RegEx	Value	Quantifiers
Any word character	\w	Exactly 2 + Δ ▽ ×
Literal	/	Exactly 1 + Δ ▽ ×
Digit	\d	Exactly 3 + Δ ▽ ×

A. Option B

B. Option C

C. Option A

D. Option D

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 66

What happens if you try to end the execution of a job by clicking the Kill/Terminate button in UiPath Orchestrator?

Options are :

A. The job state is changed to Canceled/Stopped, even if no Should Stop activity was used.

B. The execution process is killed.

C. The execution is not impacted if no Should Stop activity has been included in the workflow in Studio.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 67

In UiPath Robotic Enterprise Framework, the value of MaxRetryNumber in the Config.xlsx file should be set to a number greater than 0 to enable the retry mechanism in the following cases:

Options are :

- A. Get data from spreadsheets, databases, email, web API.
- B. Do not work with UiPath Orchestrator queues.
- C. Get data from UiPath Orchestrator queues with Auto Retry disabled.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 68

Which of the following statements related to Orchestrator are true?

Options are :

- A. A robot can execute many different jobs one after the other.
- B. A robot can execute many different jobs at the same time.
- C. Robots can be assigned to multiple environments.

Answer: A,C ([LEAVE A REPLY](#))

Valid UiPath-ARDv1 Dumps shared by Actual4test.com for Helping Passing UiPath-ARDv1 Exam! Actual4test.com now offer the **newest UiPath-ARDv1 exam dumps**, the Actual4test.com UiPath-ARDv1 exam **questions have been updated** and **answers have been corrected** get the **newest** Actual4test.com UiPath-ARDv1 dumps with Test Engine here: https://www.actual4test.com/UiPath-ARDv1_examcollection.html (**340 Q&As Dumps, 30%OFF** Special Discount: **Freepdfdumps**)